

Commercial Lamp Post Bases



General

Each cast aluminum base has a .25" minimum wall thickness with a 1.0" floor thickness. All poles are extruded aluminum. Wall thickness of the poles are as follows:

3" OD- .125" wall

4" OD- .125" wall

5" OD- .1875 wall


Installation

All commercial poles include anchor bolts and a template. The minimum diameter of the concrete pad is determined by the size of the base you select. The depth of the pad is determined by your local frost line and soil conditions. Use an elbow joint of conduit in the concrete for necessary wiring.

Electrical

Each lamp post fixture includes an incandescent socket for 110 volt electricity. High Intensity Discharge (HID) lighting, such as Metal Halide and High Pressure Sodium, is available in a variety of wattages and voltages. Other options such as time switches and photo controls are available and can be installed by your electrician. For your convenience, a button-type photo control can be factory-installed in the fixture.

CL1 BASE SERIES – 3" OD POLE

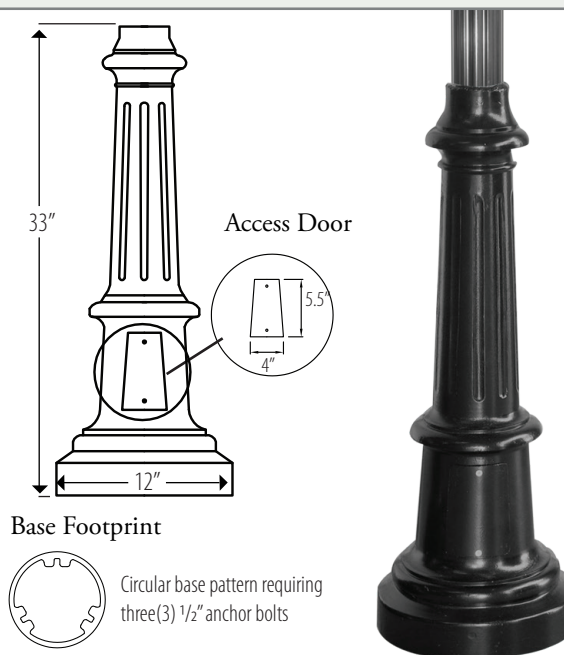

Available Heights

CL10F — 9' 4"

CL13F — 12' 4"


CL11F — 10' 4"

CL14F — 13' 4"

CL12F — 11' 4"

CL15F — 14' 4"

CL2 BASE SERIES – 4" OD POLE

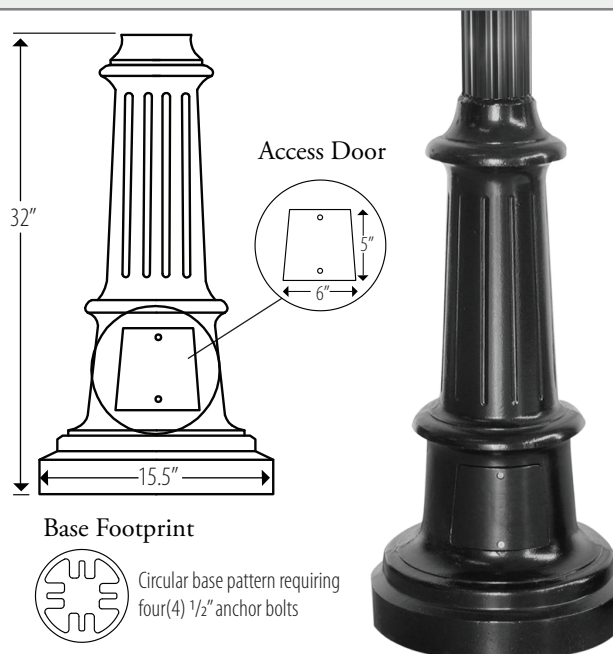

Available Heights

CL20F — 10' 4"

CL23F — 13' 4"


CL21F — 11' 4"

CL24F — 14' 4"

CL22F — 12' 4"

CL25F — 15' 4"


CL6 BASE SERIES – 4" OD POLE

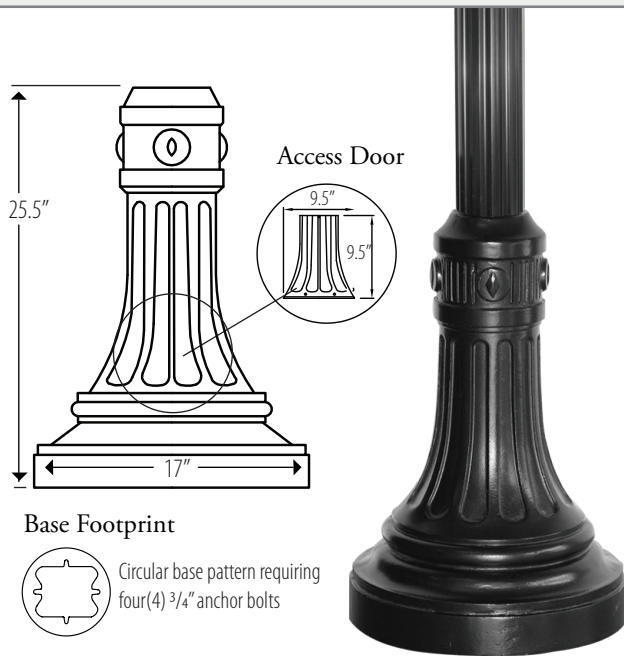

Available Heights

CL60F — 9'10"	CL63F — 12'10"
CL61F — 10'10"	CL64F — 13'10"
CL62F — 11'10"	CL65F — 14'10"


CL7 BASE SERIES – 5" OD POLE

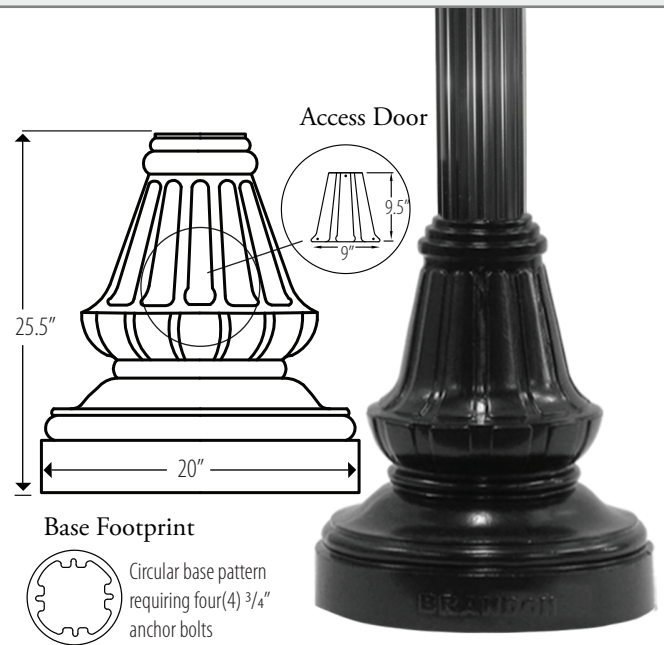

Available Heights

CL70T — 10'0"	CL73T — 13'0"
CL71T — 11'0"	CL74T — 14'0"
CL72T — 12'0"	CL75T — 15'0"


CL8 BASE SERIES – 4" OD POLE

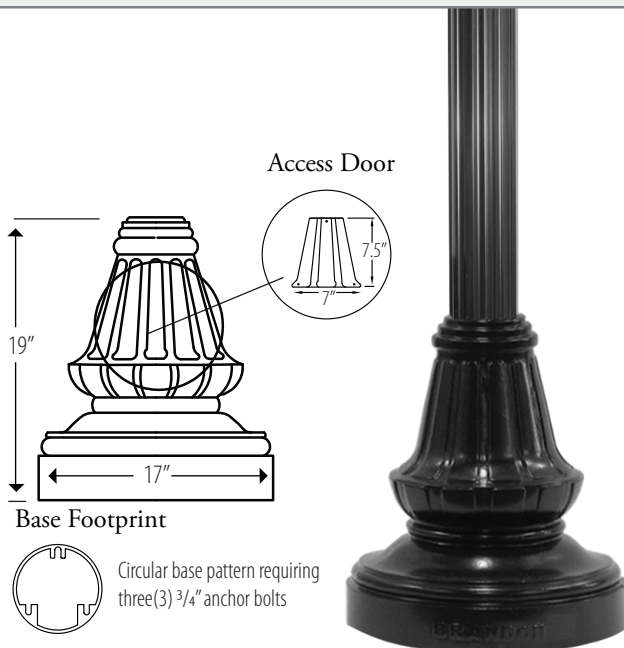

Available Heights

CL80F — 9'4"	CL83F — 12'4"
CL81F — 10'4"	CL84F — 13'4"
CL82F — 11'4"	CL85F — 14'4"

ANCHOR BASE SERIES w/2PCL8 BASE– 4" OD POLE

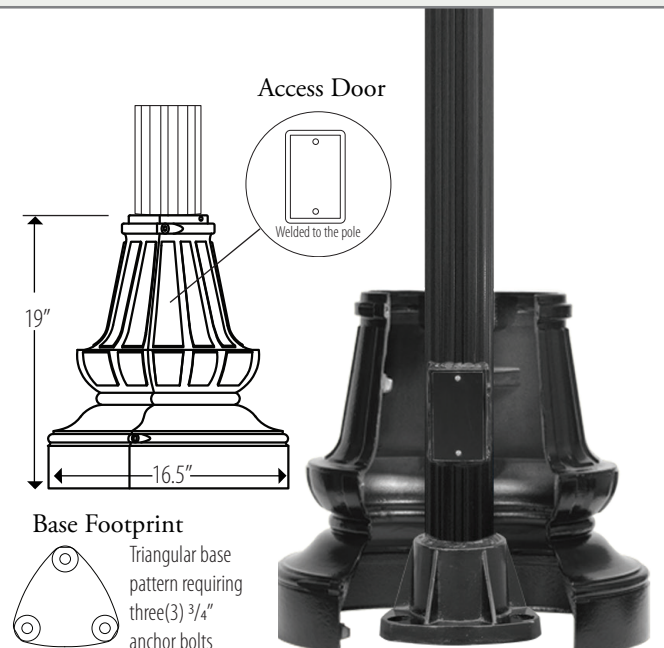

Available Heights

ABF4X9 — 9'0"	ABF4X11 — 11'0"
ABF4X10 — 10'0"	ABF4X12 — 12'0"