

INSTRUCTIONS

HID Shoe Box LED Series



SAFETY PRECAUTIONS

WARNINGS:
Please read the instructions carefully and observe installation details. Mainly apply for post top, street light, garden light and other suitable light fixtures. When using electrical equipment, basic safety precautions should always be followed including:

- Make certain power is OFF before installing or maintaining fixture.
- Operating temperature: -30°C to 60°C (-22°F to 140°F).
- These LED Lamps require all ballasts, capacitors, and ignitors to be bypassed or removed. Do not operate lamps on existing ballasts.
- **RISK OF FIRE OR ELECTRIC SHOCK.** Luminaire wiring and electrical parts may be damaged when drilling for installation of LED retrofit kit. Check for enclosed wiring and components. LED Retrofit lamp installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

FOR USE IN ENCLOSED FIXTURES

PRODUCT IS NOT DIMMABLE

NOT FOR EMERGENCY LIGHTING

When using in portable table luminaires, ensure the distance from the bottom of the base to the top of the lampholder does not exceed three (3) times the base diameter.

PRODUCT FEATURES

- UL certified
- Product applications: mainly apply for shoe box, cobra head and other suitable light fixtures.


INSTALLATION INSTRUCTIONS (cont'd)

2. Make sure the alternating current wires connect to the socket directly. (Reattach or replace ground lead if one is needed).



INSTALLATION INSTRUCTIONS

1. Remove old ballast, capacitor and ignitor (if existing) or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner. Shown as Figure 1.
(North America 100-277VAC)

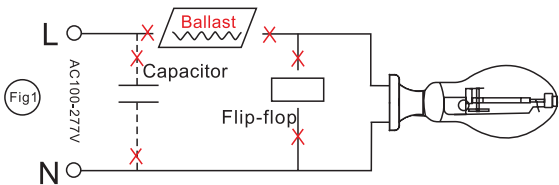

3. Screw the LED lamp onto the corresponding socket.



INSTRUCTIONS


HID Shoe Box LED Series

INSTALLATION INSTRUCTIONS *(cont'd)*


- Securely fasten the earth fly lead cable to the main body structure. If the cable are damaged in any way please replace. (Do not use existing burnt out cables. The cable if need replacement must be 1.0 mm in size and insulated from heat.)

FOR INSTALLATION USING SUPPORT STAND


For installation in downward facing horizontal fixture, use support with double "prongs". Cut to desired length after installation. See Illustration below:

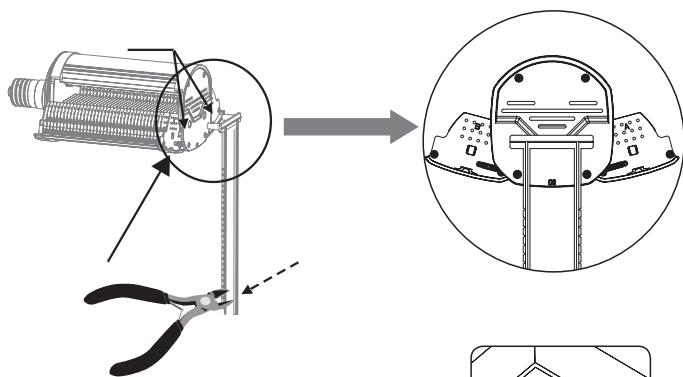


Step 1. Put the lamp into the fixture.



Step 2. Unfold the lamp body.



Step 3. Finish the installation.



WARNING: THE LAMP BODY MUST BE EXTENDED WITH 2 SIDES TO LIGHT UP.

WARRANTY

Five years warranty for each lamp, we will supply warranty based on this period. If you have any inquiries, please do not hesitate to contact us or our engineers if you do not understand these instruction.

WARNING

RISK OF FIRE OR ELECTRIC SHOCK. LED Retrofit Kit installation requires knowledge of luminaires' electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

RISK OF FIRE OR ELECTRIC SHOCK. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Do not make or alter any open holes of the wiring enclosure or electrical component enclosure during installation. Only those open holes indicated in the photographs or drawings may be added or altered as a result of kit installation.

Do not leave any other open holes in the wiring enclosure or electrical component enclosure during installation.

Installers should not disconnect existing wires from lampholder terminals to make new connections at lampholder terminals. Instead installers should cut existing lampholder leads away from the lampholder and make new electrical connections to lampholder lead wires by employing applicable connectors.

THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION.