

# ARROW LED FL-LED-MR16-SS5W


TYPE

**GO GREEN**  
EXCEEDS 35w HALOGEN

**12v Only**  
5w MR16 PLUG & PLAY LED FOR GU5.3 BI-PIN SOCKETS  
COMPATIBLE WITH MOST 12v MR16 ENCLOSED FIXTURES

**120v Only**  
5w GU10 BASE MR16 COMPATIBLE WITH MOST 120v MR16 ENCLOSED FIXTURES

- Long Life - 40,000 Hours L7 Average Rating (rated life to 70% initial light output)
- High Power White LED Light Source
- 450 Lumens (exceeds 35w Halogen)
- CRI 83 (Color Rendering Index)
- 2700K - 3000K Warm White Color
- Cool Beam, No UV or IR
- Mercury Free
- Input Voltage Range  
12v: 9v - 15v  
120v: 110v - 130v
- Dimmable
- DOE LM79 Tested / LM80 Compliant
- Power Factor >90%
- 5 Year Limited Warranty
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- ETL/cETL/CE Certified
- Available in 15° / 36° / 80°
- Must be installed in sealed fixture
- 12v LEDs must be powered by a magnetic transformer or 12v DC power source ( ie: Battery)

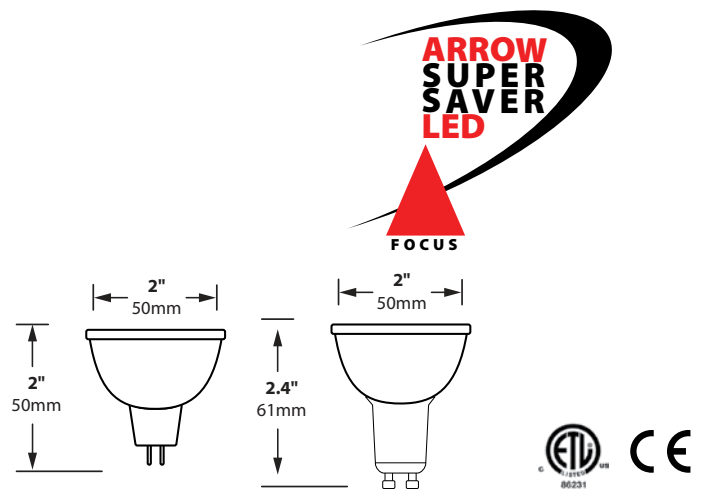

## ORDERING INFORMATION

CATALOG NO.	WATTAGE	VOLTAGE	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-MR16SS5W15	5w	12v	9v - 15v	450	2700K-3000K	SP 15°	GU5.3 Bi-Pin
FL-LED-MR16SS5W36	5w	12v	9v - 15v	450	2700K-3000K	FL 36°	GU5.3 Bi-Pin
FL-LED-MR16SS5W80	5w	12v	9v - 15v	450	2700K-3000K	VWFL 80°	GU5.3 Bi-Pin
FL-LED-MR16SS1205W15	5w	120v	110v - 130v	450	2700K-3000K	SP 15°	GU10
FL-LED-MR16SS1205W36	5w	120v	110v - 130v	450	2700K-3000K	FL 36°	GU10
FL-LED-MR16SS1205W80	5w	120v	110v - 130v	450	2700K-3000K	VWFL 80°	GU10

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

