

Catalog Number	
Project	Type

## FEATURES & SPECIFICATIONS

**CONSTRUCTION** — The housing is made of compression molded fiber reinforced polyester composite. The color impregnated SR2 composite will not flake or peel. Multiple ring/guard assemblies are available for a customizable trim finish.

**OPTICAL SYSTEM** — Flood and spot reflectors are available for HID E17 lamps. The fixture can accommodate reflector shaped lamps for specific beam patterns. Convex and walk over lenses are both available.

**ELECTRICAL SYSTEM** — The fixture can be used with up to 75W Par30 Incandescent, 50W Mercury Vapor, 50W Metal Halide, 50W High Pressure Sodium, or 32W Compact Fluorescent lamp/ballast systems. All ballast trays are thermally protected and come pre-wired to specific line voltages via quick connects. Pre-installed 15' and 30' power cords are available from the factory.


**MOUNTING** — The TDB2W Well Light is an in-ground fixture and should be installed with back fill according to the Techlight TDB installation instructions. A ½" conduit entry is supplied into the anti-siphon chamber of the housing.



## Small HID/Incandescent Burial Light TDB2W SERIES



Shown with TDB2-RG-SS  
Stainless Steel Ring

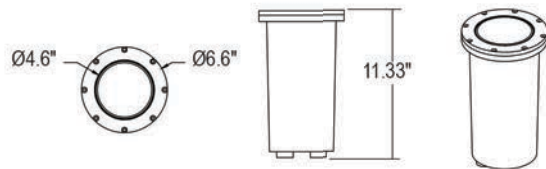

Series	Housing Height	Outside Diameter
<b>TDB2W</b>	11.33"	6.6"

## ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **TDB2W-4-2-1-2-1-4-0**

Series	Ring/Guard	Ballast	Optics	Lens	Lamp	Voltage	Cord
<b>TDB2W</b>	<b>1</b> Composite Ring (TDB2-RG-COM) <b>2</b> Composite Rock Guard (TDB2-GRD-COM) <b>3</b> Stainless Steel Ring (TDB2-RG-SS) <b>4</b> Brass Ring (TDB2-RG-BRASS)	<b>1</b> 50W MV MT <b>2</b> 50W MH MT <b>4</b> 32W FL 120V <b>5</b> 39W MH MT <b>0</b> None - for use with incandescent options	<b>1</b> Flood Reflector (TDB2W-FFR) <b>2</b> Spot Reflector (TDB2W-FSR) <b>3</b> Wiring Harness <sup>1</sup> (TDB2W-INC)	<b>1</b> Flat Lens (TDB2-GK-WO) <b>2</b> Convex Lens (TDB2-GK-CON) <b>3</b> Blue Convex Lens (TDB2-GK-CON-BLU) <b>4</b> Slip Resistant Lens (TDB2W-GK-EG)	<b>1</b> MH50MED <b>2</b> MV50R20MED <b>3</b> MV50MED <b>5</b> Q50PNF130 <b>6</b> Q50P30NS130 <b>7</b> GE48P30H120F <b>9</b> CFL32WPL <b>10</b> CDM35WPAR20NFL <b>11</b> CDM35PAR20SP	<b>1</b> 120V <b>2</b> 208V <b>3</b> 240V <b>4</b> 277V	<b>0</b> None <b>1</b> 15' Cord (TDBCOR-15) <b>2</b> 30' Cord (TDBCOR-30)

(\*Convex Lens must be used with HID E17 lamps)

## Accessories (Order as separate line items)

<b>PK2</b>	Concrete Pour Kit
<b>TDB2AFD</b>	Anti-floatation Device
<b>S37</b>	Small Glare Shield

### NOTES

- <sup>1</sup> Wiring harness must be ordered for incandescent lamping options. Incandescent lamps will be reflectorized and do not need an additional reflector.

# TDB2W Small HID/Incandescent Burial Light

## FIXTURE OPTIONS

**TDB2-RG-COM**  
Composite Ring



**TDB2-GRD-COM**  
Composite Rock Guard



**TDB2-RG-SS**  
Stainless Steel Ring



**TDB2-RG-BRASS**  
Brass Ring



**TDB2-GK-WO**  
Flat Lens



**TDB2-GK-CON**  
Convex Lens



**TDB2-GK-CON-BLU**  
Blue Convex Lens



**TDB2W-GK-EG**  
Slip Resistant Lens



## ADDITIONAL FIXTURE ACCESSORIES

**PK2**  
Concrete Pour Kit



**TDB2AFD**  
Anti-floatation Device



**S37**  
Small Glare Shield

