

Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

APPLICATION — The Bollard-LED was built to be both decorative and functional. They can be used to light pathways and walkways to help direct pedestrian traffic. They can add value to the aesthetics of a building or structure. The LED light source makes this fixture efficient as well as producing optimal color rendition.

CONSTRUCTION — The LED light source is housed within a aluminum LED body with heat dissipating fins. The fixture is made with a durable extruded aluminum housing with overall height of 47". A clear polycarbonate lens protects the optical system.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.



OPTICAL SYSTEM — The fixture comes with an adjustable aluminum reflector that creates a symmetric light pattern. It reflects the light down and outward reducing light spillage.

ELECTRICAL SYSTEM — A 60 watt single source LED Board provides 5000 Lumens of Cool White (5500K), 3650 Lumens of Warm White (3000K), or 4000 Lumens of Neutral White (4500K). A 22 watt single source LED Board provides 2000 Lumens of Cool White (5500K), 1460 Lumens of Warm White (3000K), or 1600 Lumens of Neutral White (4500K).The LED Driver is mounted to an zinc plated steel ballast tray for easy installation.


MOUNTING — The bollard comes standard with a zinc base plate, three (3) 3/4" x 18" x 3" anchor bolts, and a rigid anchor bolt template. A centrally located wire entrance is provided. The housing is mounted to the base plate via flush mounting screws.



Square LED Bollard BOLLARD SERIES

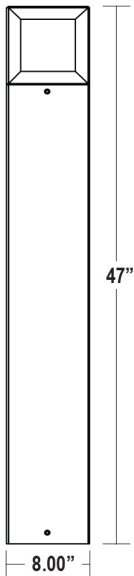

Bolt Pattern measures 4.5" bolt to bolt.



Anchor Bolts and Rigid Template may be pre-shipped at the customer's request.

Series	Housing Height	Length & Width
BOLLARD-LEDSQ	47"	8" x 8"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **BOLLARD-LEDSQ-1-1-2-1-1-4**

Series	Crown/Top	Bollard Height	Color Temp/Source	Internal Optic	Voltage	Finish
BOLLARD-LEDSQ	1 8" Square Bollard	1 47"	1 60W/5500K 2 60W/3000K 3 60W/4500K 4 22W/5500K 5 22W/3000K 6 22W/4500K	1 60W Optic 2 22W Optic	1 60W Multi-Tap ¹ 4 22W Multi-Tap ¹	1 Black 2 Bronze 3 OD Green 4 White 5 Special ²

Accessories (Order as separate line items)

- PAB3418³** 3/4" x 18" x 3" Single Anchor Bolt
- PAB3418G³** 3/4" x 18" x 3" Single Galvanized Anchor Bolt
- PBLDTEMPLATE³** Rigid Anchor Bolt Template