

Catalog Number	
Project	Type

## FEATURES & SPECIFICATIONS

**APPLICATION** — The DCM Medium Die Cast Area Light is designed for general-purpose area lighting. It is the perfect choice for lighting large open areas for safety and security. Wide roadway applications, parking areas, or even wall mount applications for security lighting are all suitable applications for this fixture. The medium size and multiple mounting options make this fixture economical and versatile.

**CONSTRUCTION** — The housing and door frame are constructed of die cast aluminum. The flat tempered glass lens is sealed in place and a door gasket is provided for weather tight protection. ETL listed for wet locations.

**FINISH** — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard colors available: Black, Bronze, US Green, White. Custom colors available upon request.


**OPTICAL SYSTEM** — Made with a state of the art high performance reflectors that use high gloss components to achieve precise photometric distributions. The fixture is a full cut-off light fixture and is Star Light Friendly in the horizontal position only.

**ELECTRICAL SYSTEM** — Available in 100W thru 400W standard metal halide, pulse-start metal halide, and high pressure sodium. Comes standard with a 4KV pulse rated mogul base socket. Each 60HZ CWA multi-tap or 480V ballast is pre-wired and installed for convenience.


**MOUNTING** — Standard mounting options include 2", 8" and 10.75" Straight Arms with internal bolt guides for square and round pole mounting on shoe-box models. 2" Adjustable Slip Fitter and Yoke Mount available for floodlight models. Additional mounting options are available.



## Medium Die Cast Area Light DCM SERIES

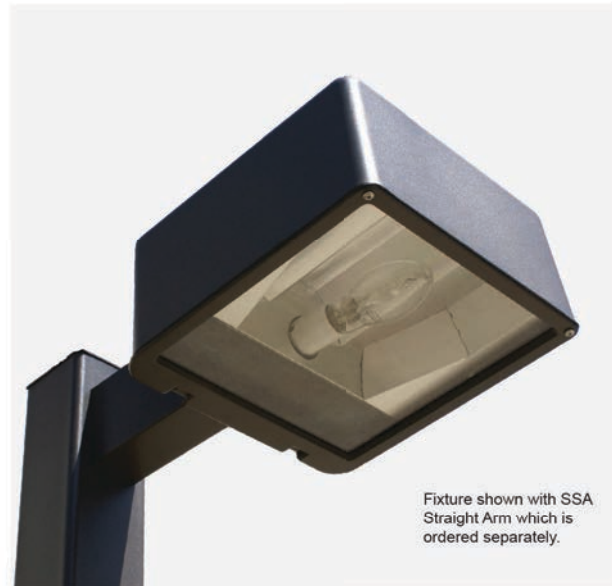

Fixture shown with SSA Straight Arm which is ordered separately.



Series	Housing Height	Length & Width	EPA
<b>DCM</b>	6.25"	16.00" x 16.00"	.95

## ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **DCMB1AL1-PS-BZ**

Series	Reflector	Wattage/Source	Voltage	Pulse-Start	Finish
<b>DCMB1</b>	<b>A</b> Standard Flood <b>D</b> Cutoff Flood <b>H</b> Narrow Parabolic <b>J</b> Medium Parabolic <b>K</b> Type I <b>F</b> Type II <b>C</b> Type III Hydroformed <b>L</b> Type III Faceted <b>B</b> Type IV <b>E</b> Type V	<b>K</b> 100W PS Metal Halide <b>V</b> 150W PS Metal Halide <b>D</b> 150W High Pressure Sodium <b>L</b> 175W Metal Halide <b>M</b> 250W Metal Halide <b>E</b> 250W High Pressure Sodium <b>T</b> 320W PS Metal Halide <b>R</b> 350W PS Metal Halide <b>N</b> 400W Metal Halide <b>F</b> 400W High Pressure Sodium	<b>1</b> Multi-Tap <sup>1</sup> <b>2</b> 480V	<b>PS</b> Pulse-Start	<b>BK</b> Black <b>BZ</b> Bronze <b>GR</b> OD Green <b>USG</b> US Green <b>WH</b> White <b>SP</b> Special <sup>2</sup>

### Accessories (Order as separate line items)

<b>2AF</b> 2" Adjustable Slip Fitter	<b>S75<sup>4</sup></b> Medium 2 Sided Back Side Shield
<b>B15</b> Adjustable Yoke Mount	<b>S101</b> Medium Vandal Shield
<b>SSA-S<sup>3</sup></b> 2" Straight Arm	<b>S104</b> Medium Wire Guard
<b>SSA-M</b> 8" Straight Arm	<b>S112</b> Medium Side Shield
<b>SSA</b> 10.75" Straight Arm	<b>S118</b> Medium 3 Sided Front Mount Visor
<b>S71</b> Medium Louvered Shield	
<b>S74</b> Medium 3 Sided Back Side Shield	

# DCM Medium Die Cast Area Light

---

## MOUNTING ACCESSORIES

---

**2AF**  
2" Adjustable Slip Fitter



**B15**  
Adjustable Yoke Mount



**SSA-S, SSA-M, SSA**  
2", 8" and 10.75" Straight Arms



---

## ADDITIONAL FIXTURE ACCESSORIES

---

**S71**  
Medium Louvered Shield



**S104**  
Medium Wire Guard



**S74**  
Medium 3 Sided Back Side Shield



**S112**  
Medium Side Shield



**S75'**  
Medium Three Sided Back Side Shield



**S118**  
Medium 3 Sided Front Mount Visor



**S101**  
Medium Vandal Shield

