

SL-16-D DOWN LIGHTS




WALL MOUNT SL-16-D-MR16



TYPE

SPECIFICATIONS

- CONSTRUCTION:** 316 stainless steel or brass cylinder and canopy
LENS: Clear tempered flat glass
CANOPY GASKET: Black newsponge closed cell .190" thickness
LAMP SUPPLIED: 20w MR16 FL(BAB) 5000 hours average rating (20w total max)
LAMP OPTIONS: We recommend 20w MR16 ULTRA10,000 hours average rating;
 20 watt MR16 TITAN 18,000 hours average rating; 4w ARROW LED 50,000 average rating
SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires
WIRING: Black and 2 White 250°C silicone lead wires
CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable
 (12/2, 10/2 or 8/2 only)
MOUNTING: Canopy included with 2 stainless steel or brass #2 Phillips, flat head, wood screws
FINISH: Stainless Steel - Machined stainless steel only
 Brass - Unfinished brass. Optional finishes available



SL-16-D-MR16-SS



SL-16-D-MR16 LED-BAR


UP/DOWN LIGHT MODEL AVAILABLE
SEE SL-16-MR16

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-16-DMR16-SS	316 Stainless Steel Down Light	20w MR16 FL(BAB)	2.0 lbs.
SL-16-DMR16-BRS	Brass Down Light	20w MR16 FL(BAB)	2.0 lbs.

COLOR/BEAM/GLARE CONTROL ACCESSORIES

- FA-08-21 Round 1/8" Black Hex Cell Louver
 FA-11-BLUE Blue Tempered Flat Glass Lens
 FA-11-GREEN Green Tempered Flat Glass Lens
 FA-11-AMBER Amber Tempered Flat Glass Lens
 FA-11-RED Red Tempered Flat Glass Lens
 FA-98-36C16 Linear Spread Tempered Glass Lens
 FA-104-SB Wide Spread Sand Blasted Glass Lens

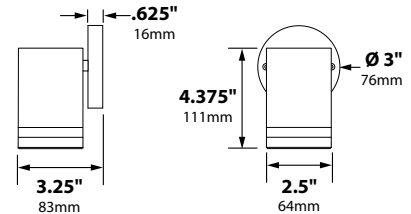

LIGHT DISTRIBUTION AND PHOTOMETRICS

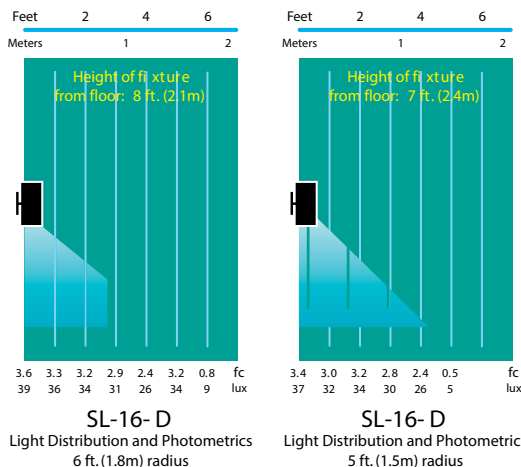

JOB INFORMATION	
Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT