



# SURFACE MOUNT RXS-01 SERIES



TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Copper directional Bullet; matching stamped copper FA-111-SM J-box and adjustable aiming bracket

**LENS:** High impact clear tempered convex glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR16 FL(BAB) 5000 hours average rating (35w max)

**LAMP OPTIONS:** We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour or ARROW SAVER 4w LED (-LAS); 40,000 hour

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

**MOUNTING:** FA-111-SM surface mount J-box



**FINISH:** Unfinished Copper. Optional finishes available




RXS-01-COP

## ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-01-COP	Copper Surface Mount Bullet with Aiming Bracket and J-Box	20w MR16 FL(BAB)	2.0 lbs.




## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

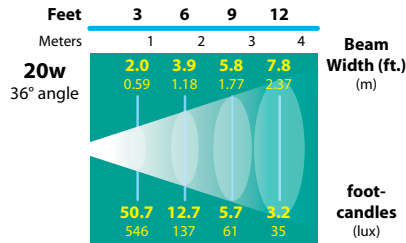


FL-13-BAB-FG



FA-111-SM

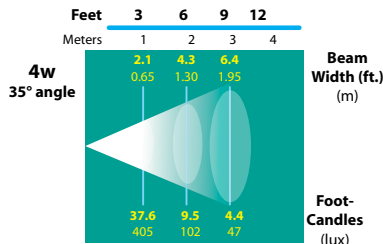

FL-LED-MR16-BAB

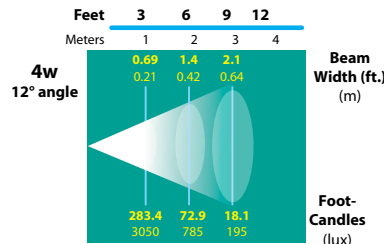

FL-LED-MR16-ESX



## JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

## BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-33-BLUE	Blue Tempered Flat Glass Lens
FA-11-33-GREEN	Green Tempered Flat Glass Lens
FA-11-33-AMBER	Amber Tempered Flat Glass Lens
FA-11-33-RED	Red Tempered Flat Glass Lens
FA-98-02	Linear Spread Tempered Glass Lens
FA-104-SB	Wide Spread Sand Blasted Glass Lens Softener

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-TRC	-BAR/CAR	-BAV/CAV	-BAT