



# SURFACE MOUNT RXS-02 SERIES



**TYPE**

## SPECIFICATIONS

**CONSTRUCTION:** Copper directional Bullet; matching stamped copper FA-111-SM J-box and adjustable aiming bracket

**LENS:** High impact clear tempered convex glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR11 FL(FTD) 2000 hours average rating (20w max)

**LAMP OPTIONS:** We recommend 2w MR11 ARROW LED 50,000 hours average rating or 20w MR11 ULTRA 10,000 hours average rating

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)


**MOUNTING:** FA-111-SM surface mount J-box

**FINISH:** Unfinished Copper. Optional finishes available




## ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-02-COP	Copper Surface Mount Bullet with Aiming Bracket and J-Box	20w MR11 FL(FTD)	2.0 lbs.

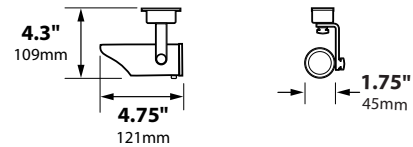


## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

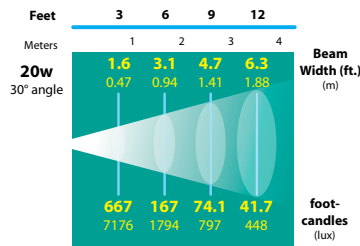


20w MR11 FL (FTD)



FA-111-SM

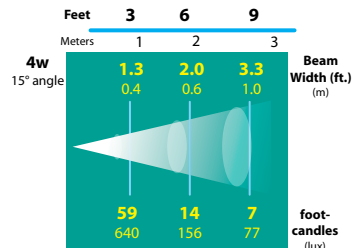

FL-LED-MR11-15

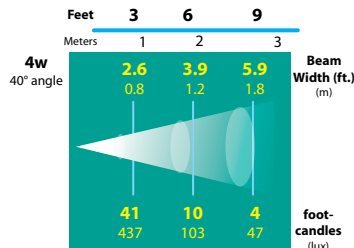

FL-LED-MR11-40



### JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

## BEAM/GLARE CONTROL ACCESSORIES

- FA-08-17 Round 1/8" Hex Cell Louver
- FA-10-17-BLUE Blue Tempered Flat Glass Lens
- FA-10-17-GREEN Green Tempered Flat Glass Lens
- FA-98-17 Linear Spread Tempered Glass Lens
- FA-104-17 Wide Spread Sand Blasted Glass Lens Softener

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT