

AREA LIGHTS AL-09 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Formed solid brass lantern; black ABS, extruded brass or extruded aluminum stanchion

LENS: Gold iridescent glass; optional plastic White Cracked Ice available (-ICE)

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 10,000 hours average rating 20w Xenon (-X) or 20w Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only



MOUNTING: 4 black ABS stabilizing fins (FA-42-FIN)

FINISH: Unfinished brass. Optional finishes available.



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
AL-09	Brass Lantern on Black ABS Stanchion	18w S8 #1141	5.0 lbs.
AL-09-BLT	Black Powder Coat Brass Lantern on Black ABS Stanchion	18w S8 #1141	5.0 lbs.
AL-09-BRS	Brass Lantern on Brass Stanchion	18w S8 #1141	8.0 lbs.
AL-09-ALUM-BLT	Black Powder Coat Brass Lantern on Black Aluminum Stanchion	18w S8 #1141	6.0 lbs.

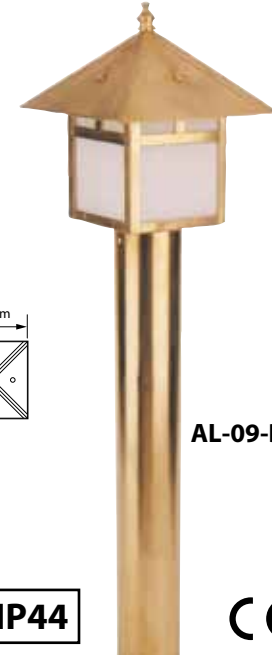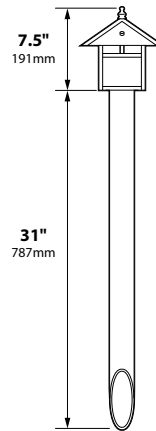


AL-09-BRS

IP44




MOUNTING ACCESSORIES



RP-42
(supplied)

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

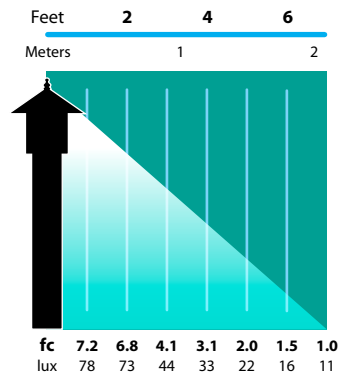

AL-09
Half Spread Photometrics
14 ft. (4.3m) diameter

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT