

AREA LIGHTS AL-12 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass Mushroom hat; matching extruded aluminum or brass stanchion

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 10,000 hours average rating 20w Xenon (-X) or 20w Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only

MOUNTING: FA-03-LG black 9" ABS stake, tapped 1/2" NPS


FINISH: Aluminum-Black texture polyester powder coat. Optional finishes available. Brass-Unfinished brass. Optional finishes available.

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
AL-12-BLT	Cast Aluminum 8" Mushroom Hat	18w S8 #1141	3.0 lbs.
AL-12-BRS	Cast Brass 8" Mushroom Hat	18w S8 #1141	6.0 lbs.



10,000 HOUR XENON & HALOGEN RECOMMENDED

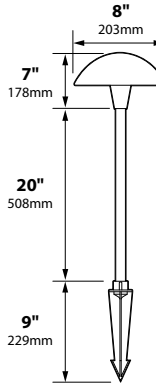


ADJUSTABLE HUB RECOMMENDED

AL-12-BRS




MOUNTING ACCESSORIES

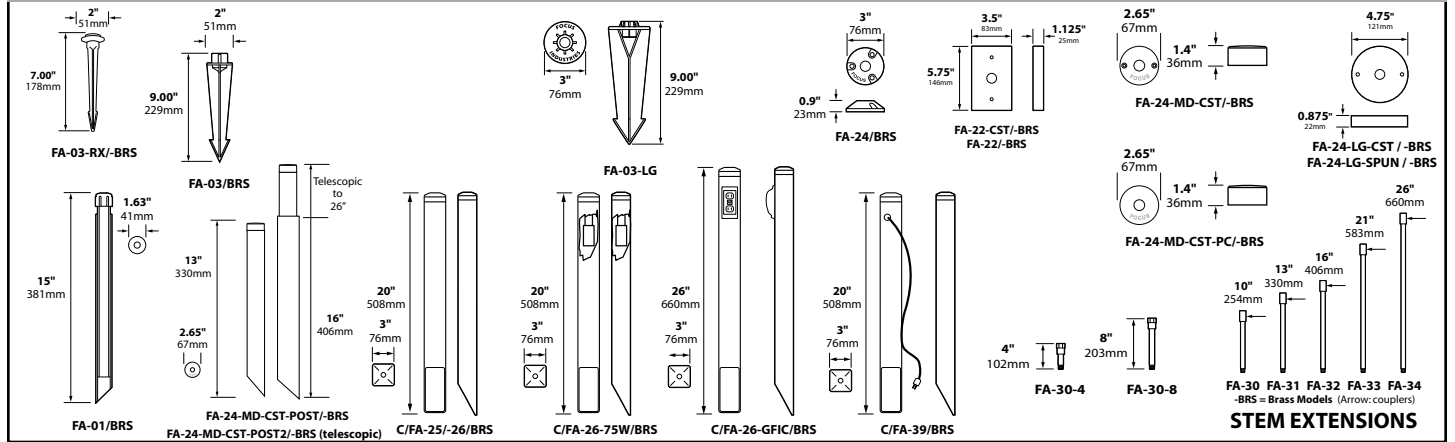

BEAM/GLARE CONTROL ACCESSORIES

- FA-97-12 AL-12 Sprinkler Guard / Glare Shield
- AH Add to catalog # for Adjustable Hub

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



AL-12 Half Spread Photometrics 18 ft. (5.5m) diameter

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT