

DIRECTIONAL LIGHTS DL-15-LEDP4 SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum, cast brass or composite flood; matching cast aluminum, brass or composite adjustable swivel

LENS: High impact clear acrylic

LIGHT SOURCE: 4w integrated LED flat panel, warm white 3000K

LIFETIME RATING: 50,000 hours

SOCKET: None

12V INTERNAL DRIVER: 5w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. For use with magnetic transformers only.

WIRING 12v: Black 3 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.

MOUNTING 12v: FA-03 black 9" ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.
Brass - Unfinished brass. Optional finishes available.
Composite - Black, Bronze or Rubbed Verde

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	EST. SHIP WEIGHT
DL-15-LEDP412V-BLT	12v Aluminum floodlight	4w LED Panel	2.0 lbs.
DL-15-LEDP412V-BRS	12v Brass floodlight	4w LED Panel	3.0 lbs.
CDL-15-LEDP412V-BLT	12v Composite floodlight	4w LED Panel	2.0 lbs.
DL-15SM-LEDPR412V-BLT	12v Aluminum floodlight	4w LED Panel	2.0 lbs.
DL-15SM-LEDPR412V-BRS	12v Brass floodlight	4w LED Panel	3.0 lbs.





DL-15SM-LEDPR412V-BLT
mounted on
FA-24-BLT

DL-15-LEDP412V-BRT
mounted on
FA-24-BRT



MOUNTING ACCESSORIES

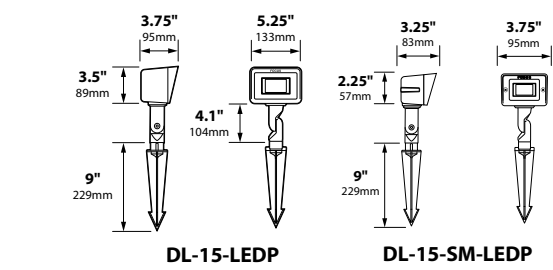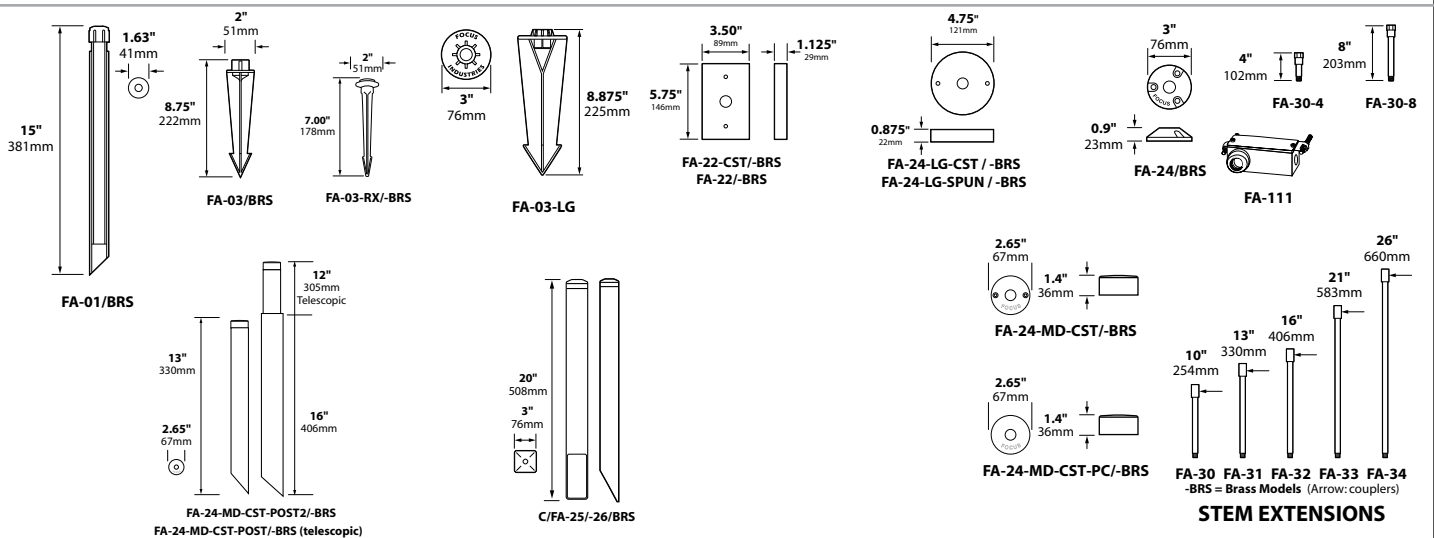

BEAM/GLARE CONTROL

- FA-07-15-SM Square 1/4" Hex Cell Louver
- FA-10-15-SMBLUE Blue Tempered Glass Lens
- FA-10-15-SMGREEN Green Tempered Glass Lens

JOB INFORMATION	
Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT