

# DL-22 DIRECTIONAL LIGHTS



# DIRECTIONAL LIGHTS DL-22-SERIES



TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Cast aluminum, brass or 316 Stainless Steel Bullet; matching heavy duty cast aluminum, brass or 316 Stainless Steel adjustable swivel

**LENS:** High impact clear tempered convex glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR16 FL(BAB) 5000 hours average rating (50w max)

**LAMP OPTIONS:** We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour or ARROW SAVER 4w LED (-LAS); 40,000 hour

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

**MOUNTING:** FA-03 black 9" ABS stake threaded 1/2" NPS


**FINISH:** Aluminum-Black texture polyester powder coat. Optional finishes available. Brass-Unfinished brass. Optional finishes available. Stainless Steel - machined finish

## ORDERING INFORMATION


| CATALOG NO.   | DESCRIPTION                         | LAMP             | SHIP WEIGHT |
|---------------|-------------------------------------|------------------|-------------|
| DL-22-BLT     | Cast aluminum Bullet                | 20w MR16 FL(BAB) | 2.0 lbs.    |
| DL-22-BRS     | Cast brass Bullet                   | 20w MR16 FL(BAB) | 3.0 lbs.    |
| DL-22-SS      | Cast Stainless Steel Bullet         | 20w MR16 FL(BAB) | 2.0 lbs.    |
| DL-22-XEC-BLT | Cast aluminum Bullet, X-long collar | 20w MR16 FL(BAB) | 2.0 lbs.    |
| DL-22-XEC-BRS | Cast brass Bullet, X-long collar    | 20w MR16 FL(BAB) | 4.0 lbs.    |



**DL-22-BRS**  
mounted on  
FA-24-BRS



DL-22



DL-22-XEC



## MOUNTING ACCESSORIES

**FA-01/BRS**: 13" 330mm, 2.65" 67mm

**FA-03/BRS**: 1.63" 41mm, 2" 51mm, 9.00" 229mm

**FA-03-LG**: 9.00" 229mm, 3" 76mm

**FA-24-MD-CST-POST/-BRS**: 15" 381mm, 1.63" 41mm

**C/FA-25/-26/BRS**: 20" 508mm, 3" 76mm

**C/FA-26-75W/BRS**: 20" 508mm, 3" 76mm

**C/FA-26-GFIC/BRS**: 26" 660mm, 3" 76mm

**FA-22-CST/-BRS**: 5.75" 146mm, 3.5" 89mm, 1.125" 28mm

**FA-22-TREE (10"-41")**: 2.65" 67mm, 1.4" 36mm

**FA-24-MD-CST-PC/-BRS**: 2.65" 67mm, 1.4" 36mm

**FA-111-TREE (10"-41")**: 4.75" 121mm, 0.875" 22mm

**FA-24-LG-CST / -BRS**: 4.75" 121mm, 0.875" 22mm

**FA-24-LG-DH-SPUN/-BRS**: 4.75" 121mm, 0.875" 22mm

**FA-24-MD-CST-TREE (10"-41")**: 2.65" 67mm, 1.4" 36mm

**FA-24/BRS**: 3" 76mm, 0.9" 23mm

**FA-24-TREE**: 10" 254mm, 13" 330mm, 16" 406mm, 21" 583mm, 660mm

**STEM EXTENSIONS**: FA-30, FA-31, FA-32, FA-33, FA-34 -BRS = Brass Models (Arrow couplers)

## BEAM/GLARE CONTROL ACCESSORIES

|             |  |
|-------------|--|
| FA-08-21    | Round 1/8" Hex Cell Louver               |
| FA-11-BLUE  | Blue Tempered Glass Lens                 |
| FA-11-GREEN | Green Tempered Glass Lens                |
| FA-98       | Linear Spread Tempered Glass Lens        |
| FA-99       | High Impact Clear Tempered Convex Glass  |
| FA-104      | Wide Spread Tempered Glass Lens Softener |

## JOB INFORMATION

Type: \_\_\_\_\_ Date: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Lamp(s): \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_

Notes: \_\_\_\_\_


| Black Texture (Standard) | Antique Verde | Bronze Texture | Camel | White Texture | Hunter Texture | Rust | Weathered Iron | Weathered Brown | Stucco | Rubbed Verde | Chrome Powder | Acid Rust | Acid Verde | Black Acid Treatment |
|--------------------------|---------------|----------------|-------|---------------|----------------|------|----------------|-----------------|--------|--------------|---------------|-----------|------------|----------------------|
| -BLT                     | -ATV          | -BRT           | -CAM  | -WTX          | -HTX           | -RST | -WIR           | -WBR            | -STU   | -RBV         | -CPR          | -BAR/CAR  | -BAV/CAV   | -BAT                 |

# DIRECTIONAL LIGHTS DL-22-SERIES




TYPE


## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

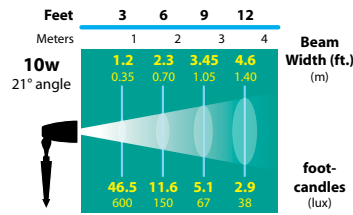


FL-13W-FG

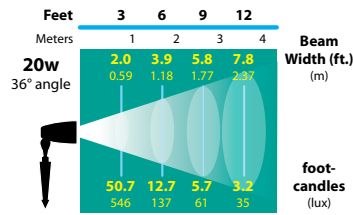


FL-13-BAB-FG

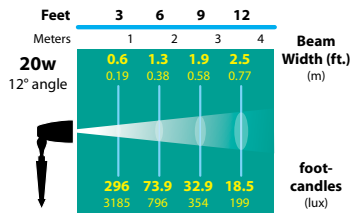


FL-13-ESX-FG

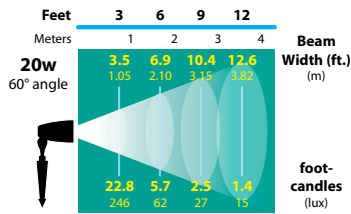


FL-13-VWFL-FG

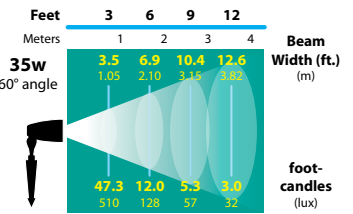


FL-15-FMW-60-FG

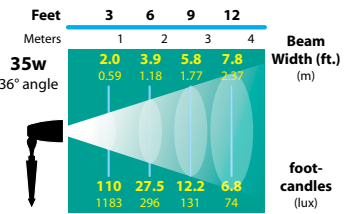


FL-15-FMW-ULTRA

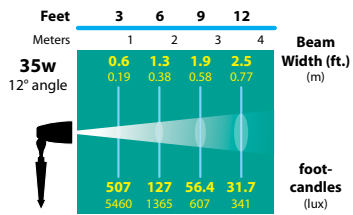


FL-15-FMT-FG

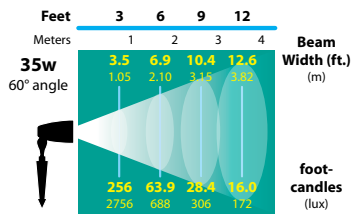


FL-15-FMV-FG  
FL-15-FMV-ULTRA

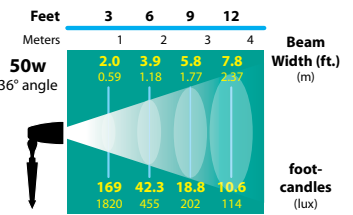


FL-10-EXN-FG  
FL-10-EXN-ULTRA

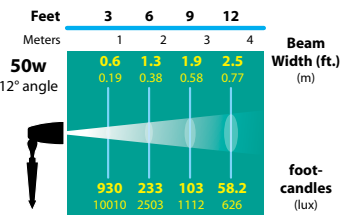


FL-10-EXT-FG  
FL-10-EXT-ULTRA

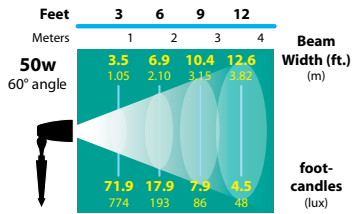


FL-10-VWFL-FG

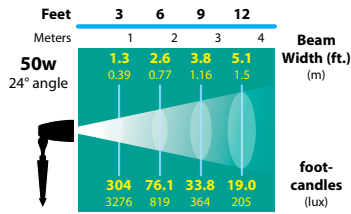


FL-10-EXZ-ULTRA

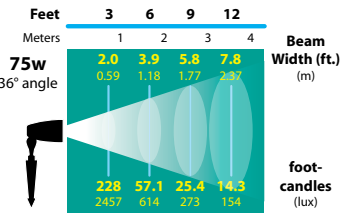


FL-13-EYC-FG

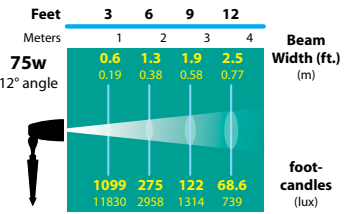

FL-20-EYF-FG

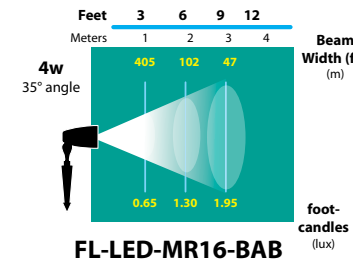

FL-LED-MR16-BAB

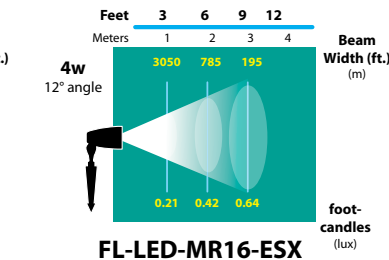

FL-LED-MR16-ESX

| Black Texture (Standard) | Antique Verde | Bronze Texture | Camel | White Texture | Hunter Texture | Rust | Weathered Iron | Weathered Brown | Stucco | Rubbed Verde | Chrome Powder | Acid Rust | Acid Verde | Black Acid Treatment |
|--------------------------|---------------|----------------|-------|---------------|----------------|------|----------------|-----------------|--------|--------------|---------------|-----------|------------|----------------------|
| -BLT                     | -ATV          | -BRT           | -CAM  | -WTX          | -HTX           | -RST | -WIR           | -WBR            | -STU   | -RBV         | -CPR          | -BAR/CAR  | -BAV/CAV   | -BAT                 |