

UNDERWATER JUNCTION BOX FA-H2OJB SERIES

TYPE

THE OCTOPUS

UL676 listed Underwater Junction Box designed for connection of up to 8 12v fixtures with 18/2 wire plus one feed wire. Supplied standard without holes or fittings. To receive tapped holes and liquid tight fittings, specify quantity and size at time of order. Hole tap sizes available are PG9, PG11, 1/2"NPS & 3/4"NPS. For 1/2" or 3/4" service conduit, consult factory. Brass Liquid Tight fittings recommended and fitting size must match cable size to ensure water proof connection.

Compatible with all Focus brand underwater fixtures and many other manufactures underwater fixtures.

SPECIFICATIONS

CONSTRUCTION: 20 cubic inch cast brass body and cast brass cover

GASKET: Black silicone, 50 durometer

FITTINGS: Standard J-box not supplied with fittings. Brass, nickel plated PG9 Liquid Tight available. Specify number required at time of order.

Note: PG9 can accept cable sizes from 0.10" to 0.31" diameter.

FITTING OPTIONS: Brass, nickel plated PG11 Liquid Tight

Note: PG11 can accept cable sizes from 0.20" to 0.39" in diameter.

INTERNAL CONNECTOR: Teal high temperature thermal plastic housing with stainless steel barrel lugs and 3M dielectric sealing tape; 200 watt maximum load

FEED WIRE: Standard J-box not supplied with feed wire. 12-2C cable available in increments of 5 feet starting at 25 feet. Specify at time of order

MOUNTING: Surface mount bracket attached

FINISH: Unfinished brass

optional finishes: Black Acid Treatment (-BAT) & Brass Acid Rust (-BAR)





ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
FA-H2OJB	Octopus Underwater Junction Box	4.0 lbs.
FA-H2OJB-25	Octopus Underwater Junction Box, with 25' 12/2C Feed Wire	5.5 lbs.
FA-H2OJB-50	Octopus Underwater Junction Box, with 50' 12/2C Feed Wire	7.0 lbs.
FA-H2OJB-75	Octopus Underwater Junction Box, with 50' 12/2C Feed Wire	8.5 lbs.

To order additional ports add number required to catalog number followed by the feed wire length. Number will include feed wire port and output ports. For example:

FA-H2OJB-4-25 Octopus Underwater Junction Box with 25' 12/2C Feed Wire and 3 PG9 liquid tight output ports

FA-H2OJB-7-50 Octopus Underwater Junction Box with 50' 12/2C Feed Wire and 6 PG9 liquid tight output ports

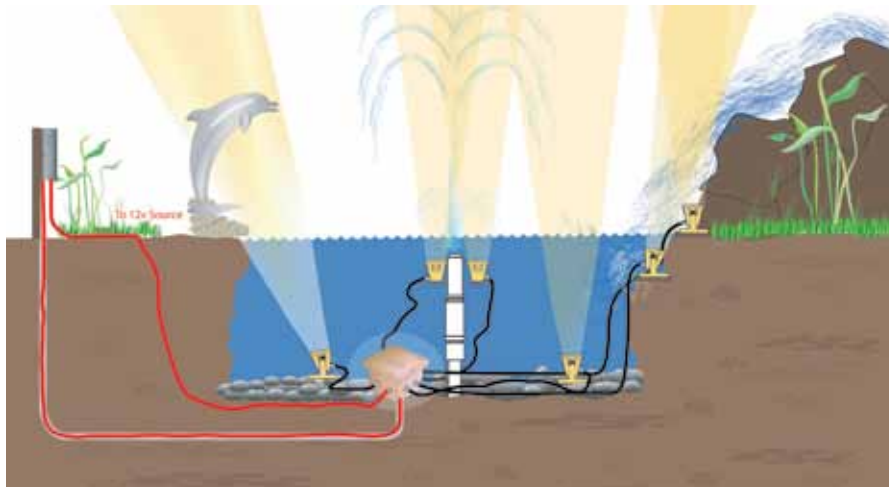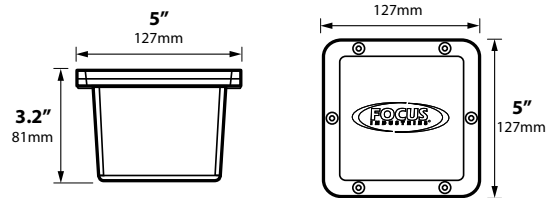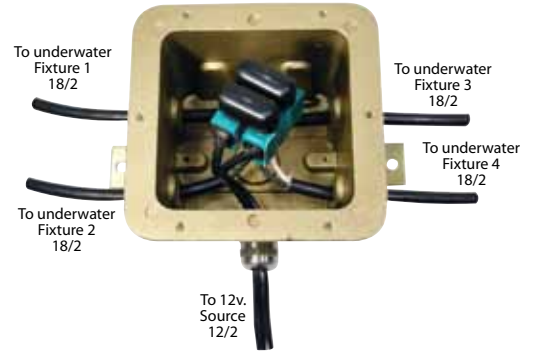

FA-H2O-JBOX Cut Sheet 020614

UL 676

IP68



CE



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	FA-H2O-JBOX Cut Sheet

FA-H2O-JB
Port Locations

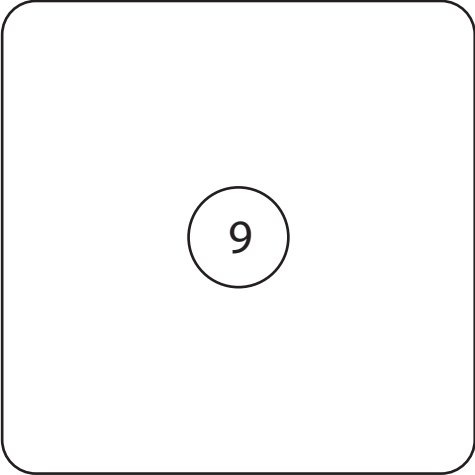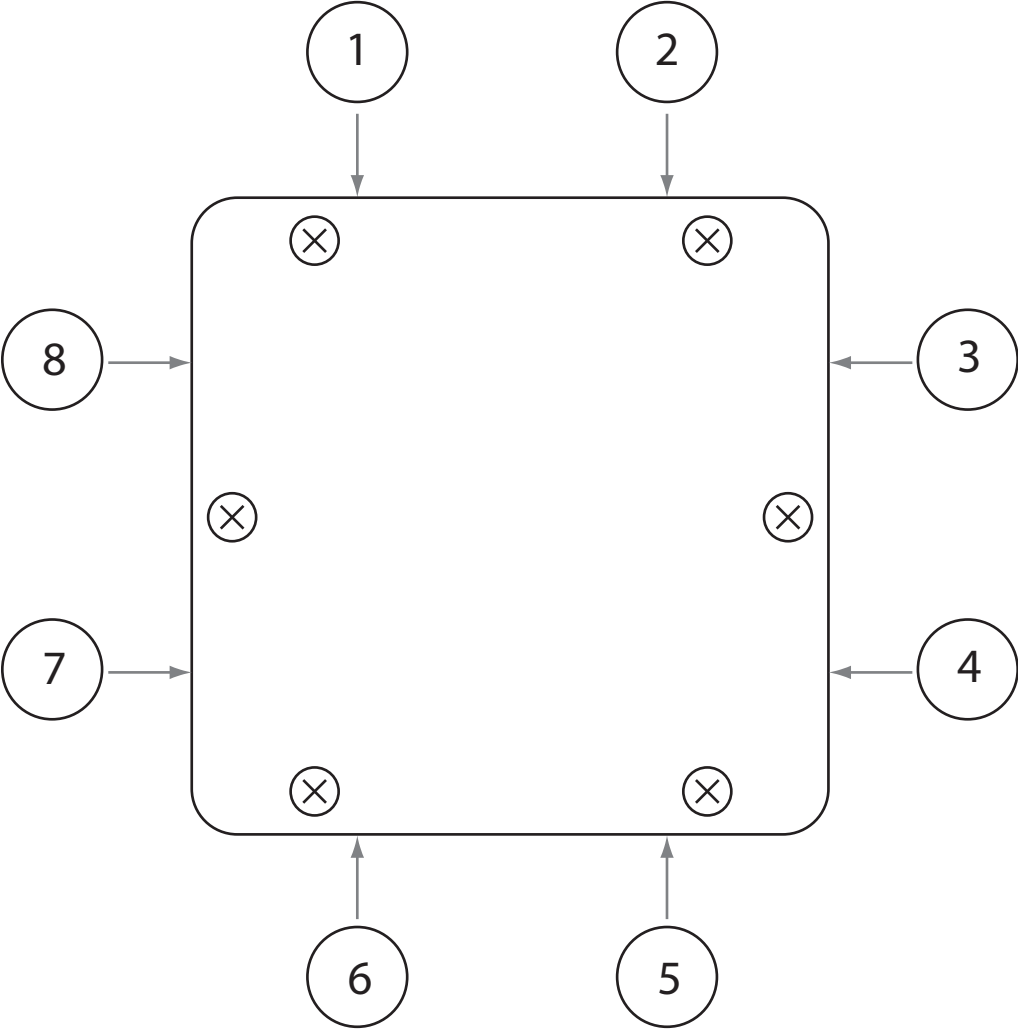

Bottom