SL-58-LEDP-CPR

SPECIFICATIONS

CONSTRUCTION: Extruded square aluminum or brass 2.25" x 8.25"; matching cast end caps

LAMP SUPPLIED: 3w 50,000 hours average rating OMNI-3 LED (-LED3)

LAMP OPTION: 10,000 hours average rating 20w Xenon (-X)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200° C silicone lead wires.
No socket for LED Panel models

LED PANEL OPTION: 12v, 4w, 300 lumen integrated LED flat panel, warm white 3000K (-LEDP); optional cool white 5200K 320 lumen available (modify part number to -LEDP52)

12v, 2w, 150 lumen integrated LED flat panel, warm white 3000K (-LEDP2W); optional cool white 5200K 170 lumen available (modify part number to -LEDP2W52)

LED PANEL LIFETIME RATING: 50,000 Hours

LED PANEL INTERNAL DRIVER*: 4w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. For use with magnetic transformers only.

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.
120v standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only

MOUNTING: Two keyhole slots, two screws provided

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
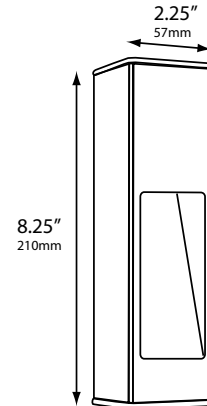Brass - Unfinished brass. Optional finishes available

*NOTE: Optional 120v to 277v drivers available. Must use junction box.

3mni LED — LEDS by CREE

SL-58-LED3-CPR

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-58-LED3-BLT	Square Aluminum Wall Mount Light	3w Omni LED	2.0 lbs.
SL-58-LED3-BRS	Square Brass Wall Mount Light	3w Omni LED	4.0 lbs.
SL-58-LEDP-BLT	Square Aluminum Wall Mount Light	4w LED Panel	2.0 lbs.
SL-58-LEDP-BRS	Square Brass Wall Mount Light	4w LED Panel	4.0 lbs.
SL-58-LEDP2W-BLT	Square Aluminum Wall Mount Light	2w LED Panel	2.0 lbs.
SL-58-LEDP2W-BRS	Square Brass Wall Mount Light	2w LED Panel	4.0 lbs.

2.25"
57mm

8.25"
210mm

IP54 CE ETL Intertek

JOB INFORMATION

Type: Date:

Job Name:

Cat. No.:

Lamp(s):

Specifier:

Contractor:

Notes:

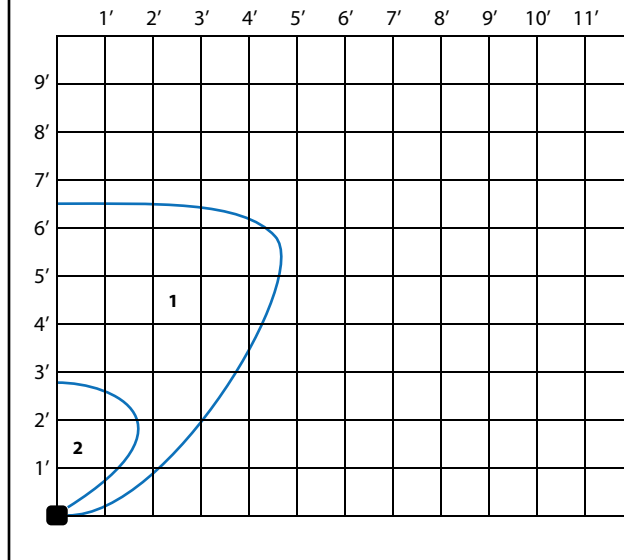| Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder		Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR		-BAR/CAR	-BAV/CAV	-BAT

BRASS & COPPER ONLY

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

SL-58-LED3

HORIZONTAL FOOTCANDLES • FIXTURE 6' FROM FLOOR

SL-58-LEDP (3000K)

HORIZONTAL FOOTCANDLES • FIXTURE 6' FROM FLOOR