



# HANGING LIGHTS RXS-04 SERIES



TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Copper tube shield hanging Bullet on 18" long baby oval brass chain and cast brass hoop; matching stamped copper FA-24-LGSPUN canopy

**LENS:** High impact clear tempered flat glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR16 FL(BAB) 5000 hours average rating (50w max)

**LAMP OPTIONS:** We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour or ARROW SAVER 4w LED (-LAS); 40,000 hour

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires


**WIRING:** Black 2 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

**MOUNTING:** FA-24-LGSPUN canopy and hardware


**FINISH:** Unfinished Copper, optional finishes available

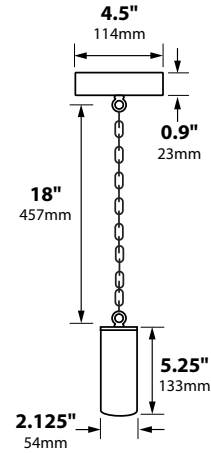

## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-04-COP	Copper Tube Shield Hanging Bullet with Chain and Canopy	20w MR16 FL(BAB)	2.0 lbs.

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

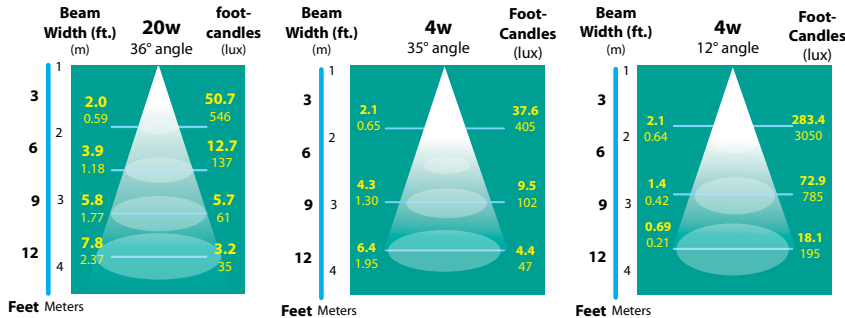

FL-13-BAB-FG

FL-LED-MR16-BAB

FL-LED-MR16-ESX



## BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-33-BLUE	Blue Tempered Flat Glass Lens
FA-11-33-GREEN	Green Tempered Flat Glass Lens
FA-11-33-AMBER	Amber Tempered Flat Glass Lens
FA-11-33-RED	Red Tempered Flat Glass Lens
FA-98-02	Linear Spread Tempered Glass Lens
FA-104-SB	Wide Spread Sand Blasted Glass Lens Softener

## JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT



# PENDANT LIGHTS RXS-07 SERIES



TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Copper tube shield Bullet with matching extruded copper stem; includes stamped copper FA-24-LGSPUN canopy

**LENS:** High impact clear tempered flat glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR16 FL(BAB) 5000 hours average rating (35w max)

**LAMP OPTIONS:** We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour or ARROW SAVER 4w LED (-LAS); 40,000 hour

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires


**WIRING:** Black 2 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

**MOUNTING:** FA-24-LGSPUN canopy and hardware

**FINISH:** Unfinished Copper. Optional finishes available

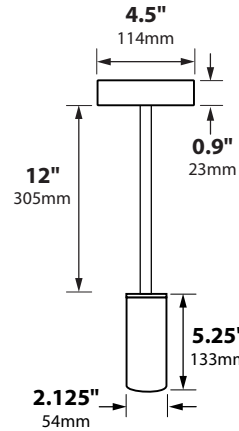


RXS-07-COP

## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-07-COP	Copper Tube Shield Pendant Light	20w MR16 FL(BAB)	2.0 lbs.

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

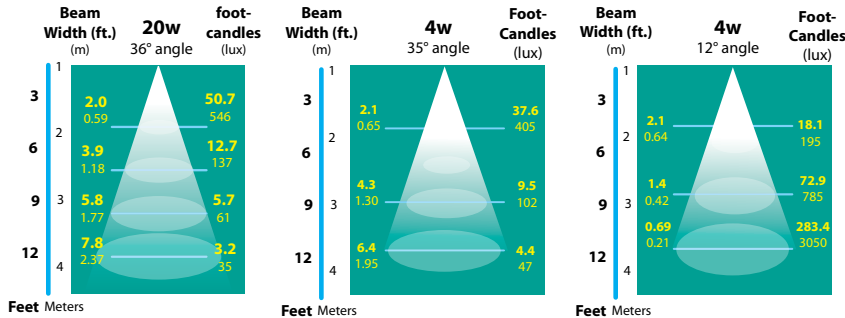

FL-13-BAB-FG

FL-LED-MR16-BAB

FL-LED-MR16-ESX



## BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-33-BLUE	Blue Tempered Flat Glass Lens
FA-11-33-GREEN	Green Tempered Flat Glass Lens
FA-11-33-AMBER	Amber Tempered Flat Glass Lens
FA-11-33-RED	Red Tempered Flat Glass Lens
FA-98-02	Linear Spread Tempered Glass Lens
FA-104-SB	Wide Spread Sand Blasted Glass Lens Softener

## JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT