



HANGING LIGHTS RXS-05 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Copper tube shield hanging Bullet on 18" long baby oval brass chain and cast brass hoop; matching spun copper FA-24-MD canopy

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

LAMP SUPPLIED: 20w MR11 FL(FTD) 5000 hours average rating (35w max)

LAMP OPTIONS: 20w MR11 ULTRA10,000 hours average rating or 2 watt ARROW LED MR11 50,000 hours average rating


SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 2 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-24-MDSPUN canopy and hardware


FINISH: Unfinished Copper, optional finishes available

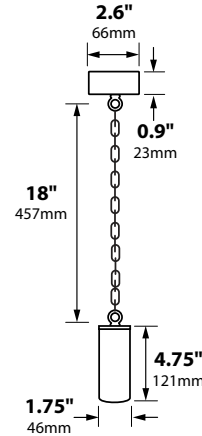


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-05-COP	Copper Tube Shield Hanging Bullet with Chain and Canopy	20w MR11 FL(FTD)	2.0 lbs.


LIGHT DISTRIBUTIONS AND PHOTOMETRICS



FL-66-FG

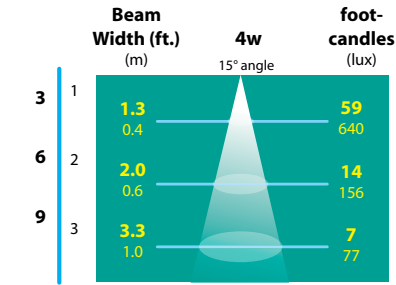

FL-LED-MR11-15

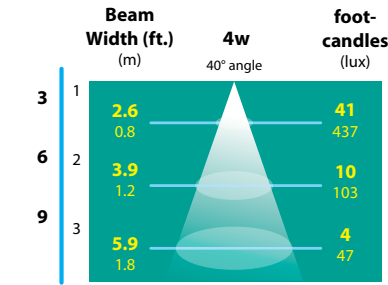

FL-LED-MR11-40



BEAM/GLARE CONTROL ACCESSORIES

FA-08-17	Round 1/4" Hex Cell Louver
FA-10-17-BLUE	Blue Tempered Glass Lens
FA-10-17-GREEN	Green Tempered Glass Lens
FA-98-17	Linear Spread Tempered Glass Lens
FA-104-17	Wide Spread Sandblasted Glass Lens Softener

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT



PENDANT LIGHTS RXS-08 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Copper tube shield Bullet with matching extruded aluminum stem; matching spun copper FA-24-MD canopy

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone

LAMP SUPPLIED: 20w MR11 FL(FTD) 5000 hours average rating (20w max)

LAMP OPTIONS: 20w MR11 ULTRA 10,000 hours average rating or 2w ARROW LED MR11 50,000 hours average rating


SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 2 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-24-MDSPUN canopy and hardware


FINISH: Unfinished Copper. Optional finishes available

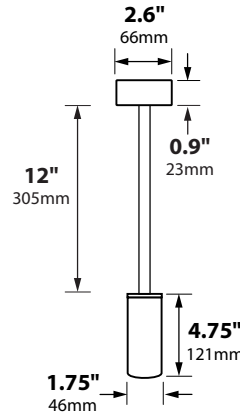

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-08-COP	Copper Tube Shield Pendant Light	20w MR11 FL(FTD)	2.0 lbs.

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

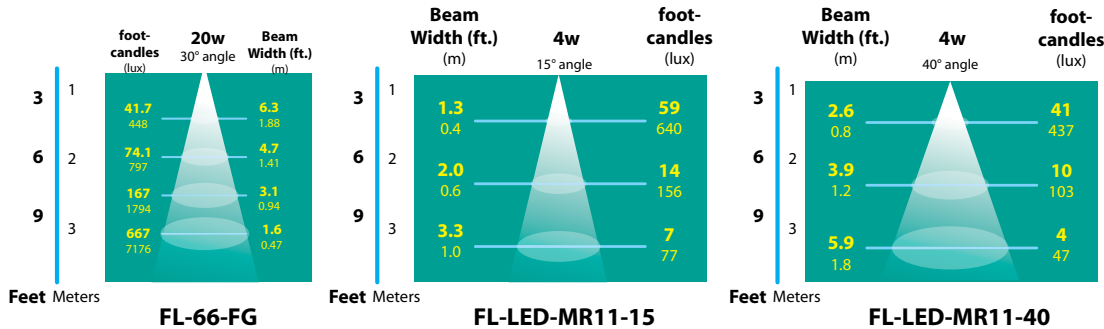

BEAM/GLARE CONTROL ACCESSORIES

FA-08-17	Round 1/4" Hex Cell Louver
FA-10-17-BLUE	Blue Tempered Glass Lens
FA-10-17-GREEN	Green Tempered Glass Lens
FA-98-17	Linear Spread Tempered Glass Lens
FA-104-17	Wide Spread Sandblasted Glass Lens Softener

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.®
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT