

PUTTING GREEN LIGHTS PGL-03 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or brass Bullet with cast aluminum or brass adjustable swivel; matching extruded aluminum or brass stanchion

LENS: Sandblasted wide spread tempered flat glass

GASKET: Black neosponge closed cell; .190" thickness

LAMP SUPPLIED: 35w MR16 VWFL(FMW); 5000 hours rating (50w max.)

LAMP OPTIONS: We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour or ARROW SAVER 4w LED (-LAS); 40,000 hour

SOCKET: High temp ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord (12v only)


For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished. Optional finishes available



PGL-03-BRT





IP54



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PGL-03-BLT	Aluminum Putting Green Light	35w MR16 VWFL(FMW)	3.0 lbs.
PGL-03-BRS	Brass Putting Green Light	35w MR16 VWFL(FMW)	6.0 lbs.

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

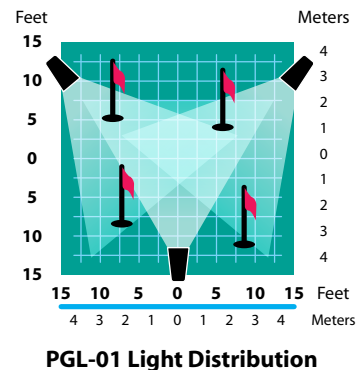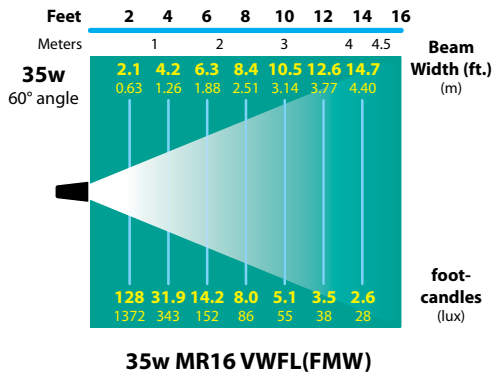

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT