

ARROW LED FL-LED-PAR36

TYPE

GO GREEN
EXCEEDS 36w HALOGEN

12v

10w PAR36 PLUG & PLAY LED

BEAM SPREADS AVAILABLE 15° / 24° / 40° / 60°


COMPATIBLE WITH FOCUS DL-03, SL-01 & SL-20-MD FIXTURES.

PLUS MOST OTHER 12v PAR36 SEALED AND OPEN FIXTURES ON THE MARKET

- IP65 - Moisture Proof Approved For Use In Sealed Or Non-Sealed Outdoor Fixtures
- NOT WATERPROOF – Do not submerge
- Long Life - 50,000 Hours L7 Average Rating (rated life to 70% initial light output)
- High Power White LED Light Source
- 400 Lumens (Equivalent to 50w Halogen)
- CRI 85 (Color Rendering Index)
- 3000K Warm White Color
- Cool Beam, No UV or IR
- Wide Input Voltage Range of 8v - 24v
- -20°C to -40°C Operating Temperature
- Non-Dimmable
- DOE LM79 Tested / LM80 Compliant
- Power Factor >90%
- 5 Year Limited Warranty
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- Available in 15° Spot 24° Narrow Flood, 40° Flood and 60° Wide Flood
- Must Be Powered By A Magnetic Transformer
- Screw Terminal connection

Warranty: 5 Year Limited Warranty covers normal use as long as the original purchaser owns the product. DO NOT submerge in water or install in area where submersion is possible. Never disassemble or modify. Non-dimmable, DO NOT use on dimmable circuits. DO NOT operate with Electronic AC transformers.

Note: Requires eyelet or spade terminal connectors

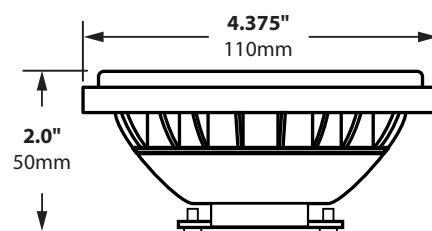

IP65




Stainless steel phillips #2 pan head screw, M4 x 6mm

ORDERING INFORMATION

CATALOG NO.	WATTAGE	VOLTAGE	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-PAR36-1015	10w	12v	8v - 24v	400	3000K	SP15°	Screw Terminal
FL-LED-PAR36-1024	10w	12v	8v - 24v	400	3000K	NFL 24°	Screw Terminal
FL-LED-PAR36-1040	10w	12v	8v - 24v	400	3000K	FL 40°	Screw Terminal
FL-LED-PAR36-1060	10w	12v	8v - 24v	400	3000K	WFL 60°	Screw Terminal

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

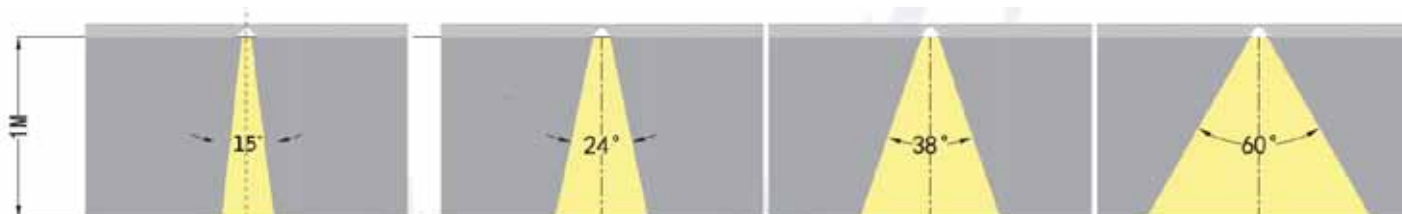

FL-LED-PAR36-1015

FL-LED-PAR36-1024

FL-LED-PAR36-1040

FL-LED-PAR36-1060