

DIRECTIONAL LIGHTS

C/DL-15-MR16-FL80



TYPE

SPECIFICATIONS

CONSTRUCTION: Aluminum, brass or composite flood; matching adjustable swivel

REFLECTOR: Black Aluminum

LENS: High impact clear tempered flat glass

LAMP SUPPLIED: 40,000 hour 7w ARROW Super Saver LED (80° very wide flood)

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Aluminum-Black texture polyester powder coat. Optional finishes available.

Brass-Unfinished. Optional finishes available.

Composite - Black

GO GREEN



CDL-15-MR16FL80BLT

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
CDL-15-MR16FL80BLT	Composite floodlight	7w MR16 LED	1.0 lbs.
DL-15-MR16FL80BLT	Aluminum floodlight	7w MR16 LED	1.0 lbs.
DL-15-MR16FL80BRS	Brass floodlight	7w MR16 LED	1.0 lbs.

BEAM/GLARE CONTROL




FA-07-15 Square 1/4" Hex Cell Louver

IP65

CE



MOUNTING ACCESSORIES

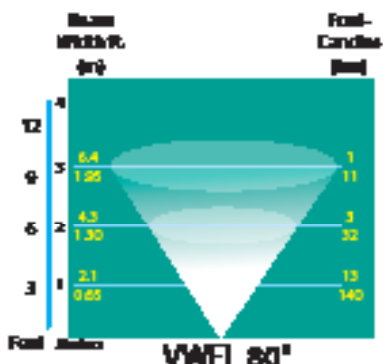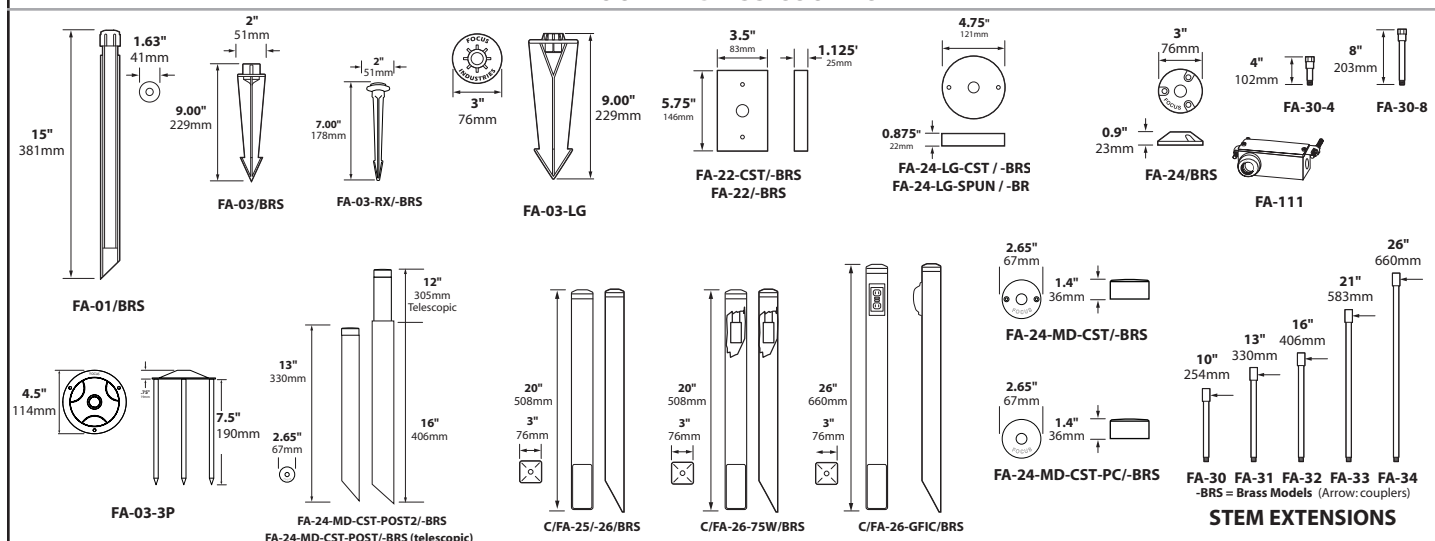

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT