

LED Panel Light | 2X2Ft/2X4Ft

150W
Equivalent




> Features

- Instant start up, with no flickering or buzzing
- Excellent brightness and color rendering with minimal glare
- Low maintenance and energy usage over a long lifespan.
- Working temperature: -4°F ~ 122°F
- Dimmable
- IP Rating IP20
- Lifetime: >50,000 Hours



> Electrical Connection

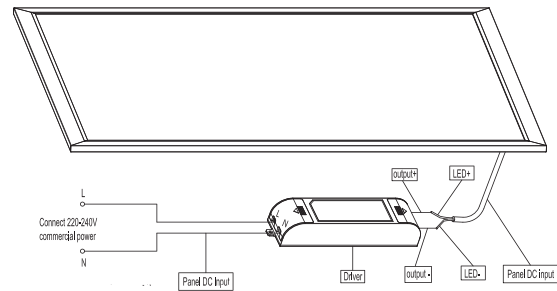

> Ordering Information

LEDi2 model#	Size	Wattage	CCT	Lumens	CRI	Voltage	Warranty	Power Factor
I2-KK-PL2X4-50W40K	2FT*4FT	50W	4000K	5250lm	>80	110-277V	5 years	>0.95
I2-KK-PL2X4-50W50K	2FT*4FT	50W	5000K	5250lm	>80	110-277V	5 years	>0.95
I2-KK-PL2X2-40W40K	2FT*2FT	40W	4000K	4200lm	>80	110-277V	5 years	>0.95
I2-KK-PL2X2-40W50K	2FT*2FT	40W	5000K	4200lm	>80	110-277V	5 years	>0.95

> Photometry

