

# LED Vapor Tight 40W



## > Features

- IK08 Rated: Impact-resistant design with knob buckle and PC cover
- Tool Free: Screwless wire connections (press type wiring)
- Metal Power Supply Housing: Better cooling than plastic shells
- Class P Power Supply
- High Transmittance Cover: Uniform, soft lighting
- Lightweight: Suitable for ceiling and suspension installation
- Corrosion Resistant
- Plastic PG13.5 and quick-connect terminal options




## > Order Information


Model	Wattage	CCT	Lumens	CRI	Beam Angle	Dimmable	Voltage
I2-SC-VTF-40W-50K	40W	5000K	5600lm	>80	120°	Yes	100-277V

SMD 2835; Milky cover; IP65; UL; DLC 4.2 Premium approved

## > Dimensions

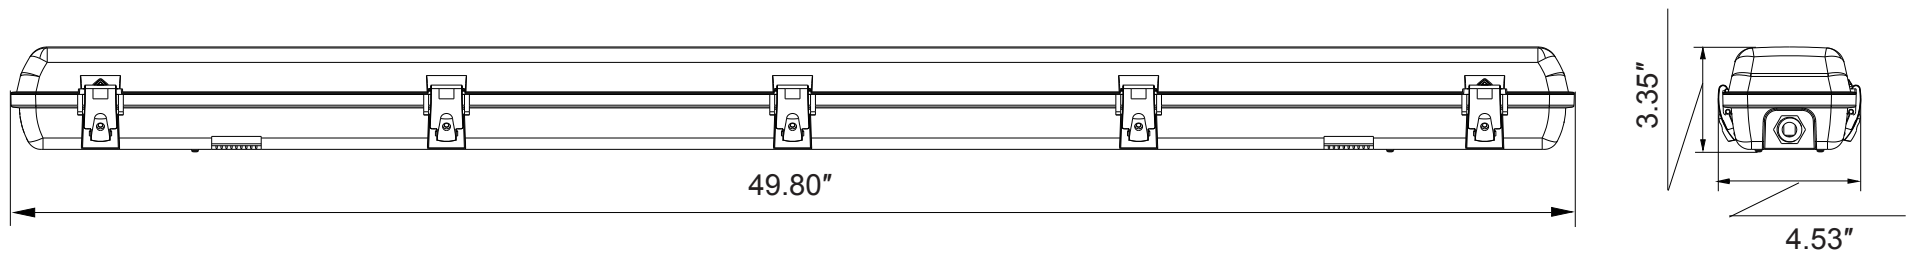

## > Light Distribution Curve

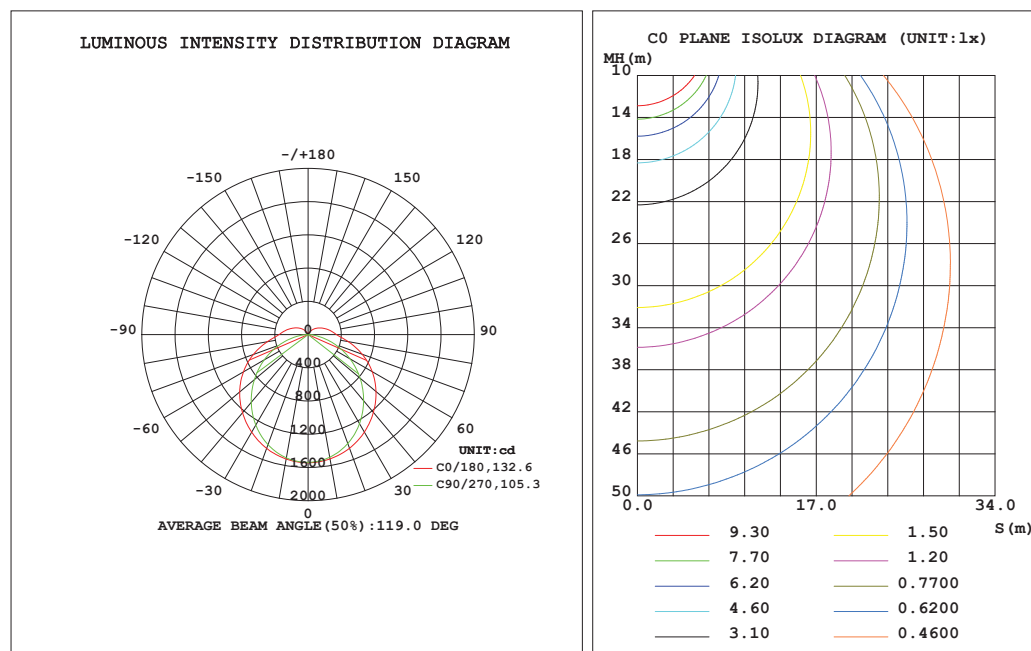

## > Installation figure

