

PATH LIGHTS PL-17 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: 2" Extruded aluminum or brass L shape design; matching cast aluminum or cast brass end cap

LENS: High impact sandblasted flat glass

LAMP SUPPLIED: 20w T4 S.C. Halogen, 10,000 hours average rating (20w max)

LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s);

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)


For 25 foot 16/2 fixture lead wire add -25F to catalog number

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only


MOUNTING: Aluminum: FA-03 black 9" ABS stake, tapped 1/2" NPS

Brass: FA-03-LG black 9" oversize ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available

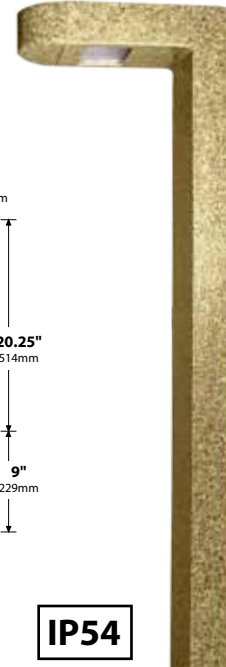

PL-17-CAM

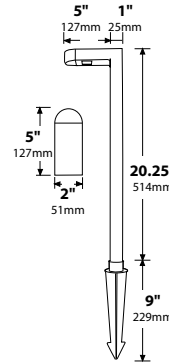


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-17-BLT	2" Extruded Aluminum Path Light	20w T4 Halogen	2.0 lbs.
PL-17-BRS	2" Extruded Brass Path Light	20w T4 Halogen	4.0 lbs.

MOUNTING ACCESSORIES

FA-03-RX/-BRS: 7.00" (178mm) height, 2" (51mm) diameter.
FA-03-BRS: 9.00" (229mm) height, 2" (51mm) diameter.
FA-03-LG: 9.00" (229mm) height, 3" (76mm) diameter.
FA-24-BRS: 0.9" (23mm) height, 3" (76mm) diameter.
FA-22-CST/-BRS: 5.75" (146mm) height, 3.5" (89mm) diameter.
FA-22/-BRS: 1.125" (28mm) height, 3.5" (89mm) diameter.
FA-24-MD-CST/-BRS: 2.65" (67mm) height, 1.4" (36mm) diameter.
FA-24-LG-CST / -BRS: 4.75" (121mm) height, 0.875" (22mm) diameter.
FA-24-LG-SPUN / -BRS: 4.75" (121mm) height, 0.875" (22mm) diameter.
FA-24-MD-CST-PC/-BRS: 2.65" (67mm) height, 1.4" (36mm) diameter.
FA-01/BRS: 15" (381mm) height, 1.63" (41mm) diameter.
FA-24-MD-CST-POST2/-BRS (telescopic): 13" (330mm) height, 2.65" (67mm) diameter.
C/FA-25/-26/BRS: 20" (508mm) height, 3" (76mm) diameter.
C/FA-26-75W/BRS: 20" (508mm) height, 3" (76mm) diameter.
C/FA-26-GFIC/BRS: 26" (660mm) height, 3" (76mm) diameter.
C/FA-39/BRS: 20" (508mm) height, 3" (76mm) diameter.
FA-30-4: 4" (102mm) height.
FA-30-8: 8" (203mm) height.
STEM EXTENSIONS: FA-30 (10" / 254mm), FA-31 (13" / 330mm), FA-32 (16" / 406mm), FA-33 (21" / 533mm), FA-34 (26" / 660mm). -BRS = Brass Models (Arrow: couplers)

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

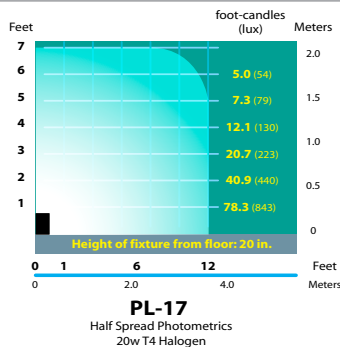

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT