


## TLMR16CB

### Low Voltage Copper MR16 Bullet

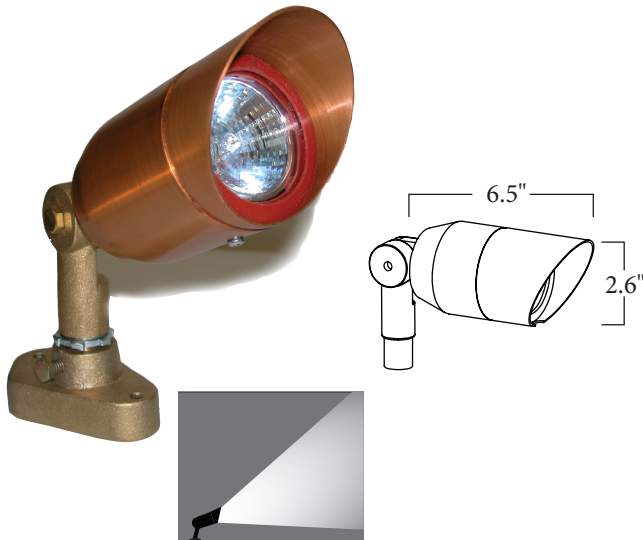

## DESIGN

The TLMR16CB Series of low voltage MR16 bullets are sleek and low profile. Nearly seamless integration of the shield assembly removes the opportunity for debris and water to accumulate. The array of MR16 color temperatures and beam spreads available make these fixtures indispensable for directional flood and spot lighting applications.

## ACCESSORIES



BRASS TREE BASE  
B06



MOUNTING STAKE  
SMSB - 12" x 1"  
MMSB - 18" x 1"  
LMSB - 20" x 2½"



BRASS JUNCTION BOX  
TLSBBJB

## ORDERING INFORMATION

Description	Part Number
MR16 QUARTZ HALOGEN, BULLET ONLY	TLMR16CB- (A)
MR16 QUARTZ HALOGEN, SHORT SHIELD	R2MR16LWC-S- (A)
MR16 QUARTZ HALOGEN, LONG SHIELD	R2MR16LWC-L- (A)


### Option Codes

#### (A) Finish

BK - Black  
BZ - Bronze  
GR - OD Green  
WH - White  
PT - Patina  
SP - Special

\*Lamps not included

## SHIELDS/LENS

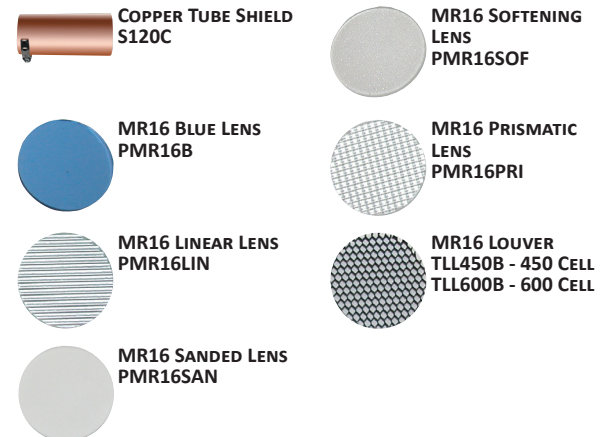

## TECHNICAL INFORMATION

Constructed of die cast copper, it comes standard with a die cast brass ½" threaded knuckle mount. Light sources available up to 50W MR16 bi-pin base. The fixture can be finished with a durable polyester powdercoat paint, left unfinished to patina naturally, or provided with a factory applied patina finish.