

COMMERCIAL BARBECUE LIGHT BQ-CD02 COMMERCIAL SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: 316 stainless steel housing
ARM: 24" tall 316 stainless steel ridged stem and 335Ø x 90Ø rotating swivel
MOUNT: 316 stainless steel deck mount canopy
FINISH: Stainless Steel – Brushed
LENS: High impact clear tempered flat glass
O-RING: High temperature red silicone, 70 durometer
SWITCH: On/Off push button with weatherproof rubber boot cover

12v ELECTRICAL SPECIFICATIONS:


LED SUPPLIED: 7w MR16 GU5.3 Super Saver (L-48)
 40,000 hours average rating
SOCKET: High temperature ceramic GU5.3 bi-pin,
 250°C silicone insulated lead wires
WIRING: Black 10 foot 18/2 zip cord from base of fixture (12v only)
 For 25 foot 16/2 wire add -25F to catalog number

120v ELECTRICAL SPECIFICATIONS:

LED SUPPLIED: 7w ARROW PAR16 (L-134)
 40,000 hours average rating
SOCKET: High temperature ceramic Base (E26/27) medium base,
 250°C silicone insulated lead wires
WIRING: Standard Three Wire 16" lead wires from base of fixture

ORDERING INFORMATION

| CATALOG NO. | DESCRIPTION | LAMP | SHIP WEIGHT |
|------------------------------------|-----------------------------------|-----------------|-------------|
| 12v BQCD02L48SS | Commercial Deck Mount BQ Light | 7w MR16 LED SS | 7.0 lbs. |
| 120v BQCD02L134SS | Commercial Deck Mount BQ Light | 7w PAR16 LED SS | 7.0 lbs. |

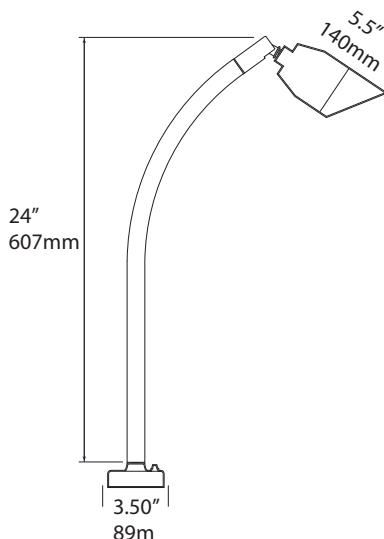

JOB INFORMATION

| | |
|-------------|-------|
| Type: | Date: |
| Job Name: | |
| Cat. No.: | |
| Lamp(s): | |
| Specifier: | |
| Contractor: | |
| Notes: | |