

OZARK

Soft Accent Light



DESCRIPTION

This Soft Accent Light comes complete with an adjustable glare shield, Brilliance Metal Works signature adjusting system with 22 points of articulation in 10 degree increments, ABS mounting stake, and Lighting Shrink Professional crimp and heat shrink cable connector.

LAMP: Integrated LED light with two brightnesses:

- 1W, 60 Lumens, 2700K
- 2W, 120 Lumens, 2700K


FINISH: Machined aluminum

USE: Up lighting, grazing, and backlighting techniques.

Best used when low level wall wash techniques are required



Part Number: **OZARK SAL-SLB-AL-BLK**
OZARK SAL-DB-SLB-AL-BLK

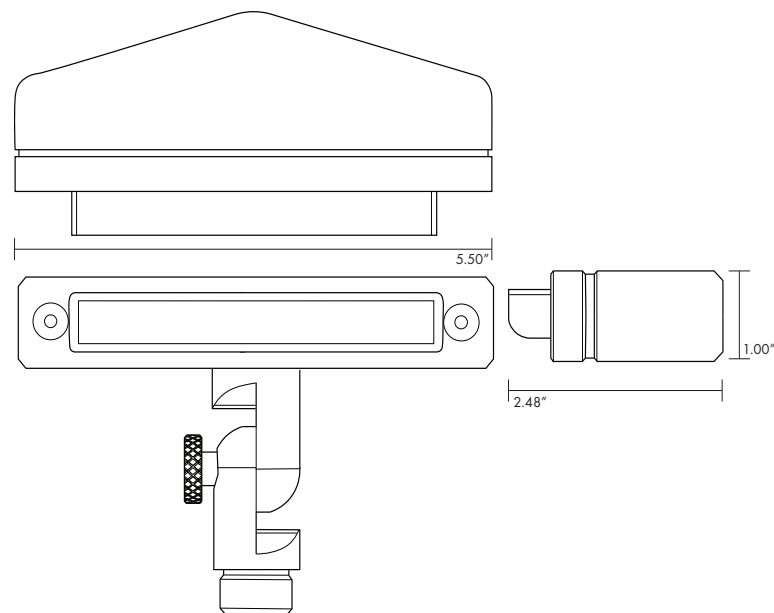

INSTALLING THE FIXTURE

1. Dig a hole in the ground approximately 4" wide by 10" deep. A rubber mallet may be used o drive the stake into the ground when working with soft soil.
2. Lay the power cable from the fixture into the slotted relief on the stake.
3. Screw the fixture into the stake.
4. Use a level to assure the top of the spike is level with the ground.

ADJUSTING THE FIXTURE

1. Turn the knuckle counter-clockwise to loosen the knuckle.
2. Rotate the fixture vertically to the desired position.
3. Turn the knuckle clockwise to hold it in the desired position.