

BARBECUE LIGHTS: THREADED CYLINDER BQ-FC03 CLAMP SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: 316 stainless steel housing

ARM: 12" tall 316 stainless steel rigid stem with a 16" stainless steel flex arm on top and clear weatherproof polyolefin cover over flex arm

MOUNT: 3" (max opening 2") or 5" (max opening 3.5") stainless steel clamp

FINISH: Stainless Steel – Brushed

LENS: High impact clear tempered flat glass

O-RING: High temperature red silicone, 70 durometer

SWITCH: On/Off push button with weatherproof rubber boot cover

12v ELECTRICAL SPECIFICATIONS:

LED SUPPLIED: 7w MR16 GU5.3 Super Saver (L-48)

40,000 hours average rating

SOCKET: High temperature ceramic GU5.3 bi-pin,
250°C silicone insulated lead wires

WIRING: Black 10 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 wire add-25F to catalog number

120v ELECTRICAL SPECIFICATIONS:

LED SUPPLIED: 7w ARROW PAR16 (L-134)

40,000 hours average rating

SOCKET: High temperature ceramic Base (E26/27) medium base,
250°C silicone insulated lead wires

WIRING: 120 volt supplied with 9 foot power cord & plug.

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
12v			
BQFC303L48SS	3" Clamp Mount BBQ Light	7w MR16 LED SS	4.0 lbs.
BQFC503L48SS	5" Clamp Mount BBQ Light	7w MR16 LED SS	4.0 lbs.
120v			
BQFC303L134SS	3" Clamp Mount BBQ Light	7w PAR16 LED SS	4.0 lbs.
BQFC503L134SS	5" Clamp Mount BBQ Light	7w PAR16 LED SS	4.0 lbs.




FC3 3"Clamp

FC5 5"Clamp

ACCESSORIES

FA-BQCOVER

Vinyl Protective Cover For Flex-Arm
BQ Lights w/ Drawstring Closure

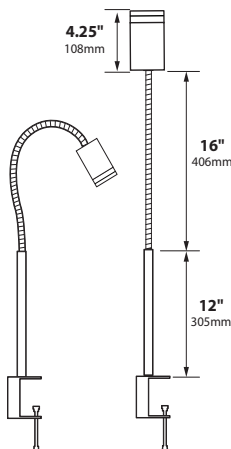

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	