



GO GREEN

75% - 80% LESS ENERGY

85v-277v

**E26 MEDIUM BASE PAR LAMPS COMPATIBLE WITH FOCUS
120v-277v ENCLOSED FIXTURES**

- Long Life - 50,000 Hours L7 Average Rating (rated life to 70% initial light output)
- High Power White LED Light Source
- Halogen Equivalent Lumens
- CRI 80 (Color Rendering Index)
- 3000K Warm White Color
- Cool Beam, No UV or IR
- Input Voltage Range of 85v - 277v
- Dimmable
- DOE LM79 Tested / LM80 Compliant
- Power Factor .6
- 5 Year Limited Warranty
- ETL/cETL, CE & Energy Star Certified
- Available in 15° Spot and 40° Flood
- Must be installed in sealed fixture



PAR20SS ORDERING INFORMATION • EQUAL TO 75w HALOGEN


CATALOG NO.	WATTAGE	L#	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-P20SS15	8w	140	85v - 277v	600	3000K	SP 15°	E26
FL-LED-P20SS40	8w	142	85v - 277v	600	3000K	FL 40°	E26

PAR30SS ORDERING INFORMATION • EQUAL TO 100w HALOGEN

CATALOG NO.	WATTAGE	L#	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-P30SS15	12w	148	85v - 277v	960	3000K	SP 15°	E26
FL-LED-P30SS40	12w	150	85v - 277v	960	3000K	FL 40°	E26

PAR38SS ORDERING INFORMATION • EQUAL TO 150w HALOGEN

CATALOG NO.	WATTAGE	L#	VOLTAGE RANGE	LUMEN OUTPUT	COLOR TEMP	BEAM ANGLE	BASE
FL-LED-P38SS15	15w	156	85v - 277v	1550	3000K	SP 15°	E26
FL-LED-P38SS40	15w	158	85v - 277v	1550	3000K	FL 40°	E26

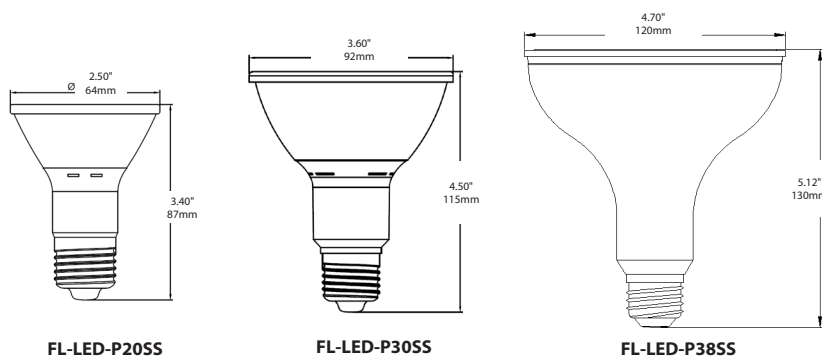

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____