

PATH LIGHTS PL-23-LG SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded 4.00" square aluminum or brass with angled cap

12v ELECTRICAL SPECIFICATIONS:

LED SUPPLIED: 7w, 80° MR16 GU5.3 Super Saver (L-48)

40,000 hours average rating

SOCKET: High temperature ceramic GU5.3 bi-pin,

250°C silicone insulated lead wires

12v WIRING: Black 10 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 wire add-25F to catalog number

120v ELECTRICAL SPECIFICATIONS:

LED SUPPLIED: 7w, 80° ARROW PAR16 (L-134)

40,000 hours average rating

SOCKET: High temperature ceramic GU10 bi-pin,

250°C silicone insulated lead wires


120v WIRING: Standard Three Wire 16" lead wires from base of fixture

12v MOUNTING: FA-03-3P Three prong mounting stake

120v MOUNTING: U mount

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available

Brass - Unfinished brass. Optional finishes available

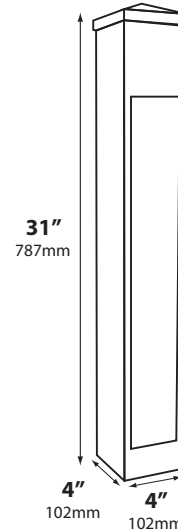


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL23LGL50BLT	12v Square Aluminum Bollard	7w MR16 LED	4.0 lbs.
PL23LGL50BRS	12v Square Brass Bollard	7w MR16 LED	7.0 lbs.
PL23LGL118BLT	120v Square Aluminum Bollard	7w MR16 LED	4.0 lbs.
PL23LGL118BRS	120v Square Brass Bollard	7w MR16 LED	7.0 lbs.

U-BRACKET DECK MOUNT MODELS

Concrete Mounting Bolts/Anchors
Supplied by Others

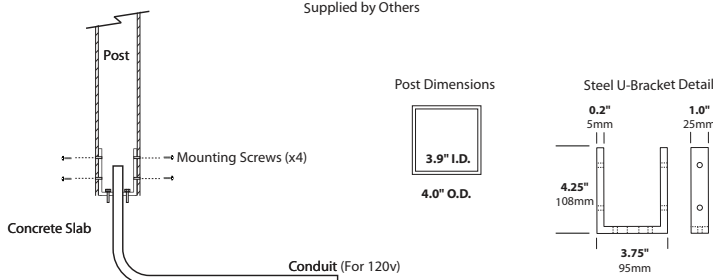

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT