

Catalog Number	
Project	Type

FEATURES & SPECIFICATIONS

POLE — The 17.5' two (2) piece pole shaft is fabricated from hot rolled carbon steel having a minimum yield of 55,000 PSI and conforms to ASTM-A-500 grade C requirements. The hand hole is located 1' 6" above the pole base. A ground lug is provided standard. The pole is drilled to accommodate multiple sporting applications.


ANCHOR BASE — The base plate is fabricated from a structural quality hot rolled carbon steel plate that has a minimum yield strength of 36,000 PSI. The hinge mechanism is provided with two (2) locks to prevent unwarranted tampering. A full base cover is provided which encapsulates the base plate and anchor bolts to provide a clean transition from pier to pole. A set of four (4) fully galvanized 3/4" x 18" x 3" anchor bolts and a rigid template are used for installation (ordered separately for pre-shipment). Each bolt comes with two (2) galvanized hex nuts and flat washers.

FINISH — A Super Durable Polyester powder coat finish is electrostatically applied in our state of the art paint facility. Standard color available: Black, Bronze, US Green, White. Custom colors available upon request.

MOUNTING — The pole comes standard with a 2 3/8" OD tenon to accommodate single and double metal halide or LED fixtures and mounting hardware.



Sports/Recreational Light System SPORT POLE SERIES



Dimensions are for 1000W Metal Halide Fixtures. See page 2 for pole dimensions.

NOTE: ANCHOR BOLT KITS MUST BE ORDERED AS A SEPARATE LINE ITEM. EACH KIT IS PROVIDED WITH A RIGID TEMPLATE FOR INSTALLATION. SEE ACCESSORIES FOR KIT PART NUMBERS. PLEASE NOTE ON PURCHASE ORDER IF ANCHOR BOLTS AND TEMPLATES ARE TO BE PRE-SHIPED.

Series	Housing Height	Length & Width
1000W MH	9.75"	22.00" x 22.00"

ORDERING INFORMATION

Choose the bold face options for the appropriate luminaire configuration for your application and enter on the line above each fixture attribute. Accessories may be factory installed, depending on the particular accessory chosen, but still be ordered as a separate line item.

Example: **SPORT 175 BK T238 400 277**

SPORT		SPORT		SPORT		SPORT		SPORT		SPORT	
Series	Height	Color		Mounting		Fixture		Voltage ³		SPORT	
SPORT	175 17.5'	BK Black		T238 Single Fixture Mount		400 400W MH		120 120 Volt			
		BZ Bronze		TV2 Dual Fixture Mount		1000 1000W MH		208 208 Volt			
		WH White						240 240 Volt			
		GR US Green						277 277 Volt			
								480 480 Volt			

NOTES


- 1 Custom RAL color matching is available. Contact your Techlight sales representative for additional information.
- 2 LED models are provided with a 100-300V auto ranging power supply. For 120V, 208V, 240V or 277V LED installations, use 240 as the voltage ordering code. For 480V LED installations, use 480 as the voltage ordering code.
- 3 120V, 208V, 240V and 277V options are provided with pre-wired Multi-Volt Metal Halide ballasts.
- 3 Please note location for additional hand hole when ordering. See Drilling Locations diagram for location designations.
- 4 S121 shields must be specified as left or right sided shield from the mounting side point of view.

Accessories (Order as separate line items)

KAB3418G125 AB Kit (4) 3/4" x 18" Galvanized Bolts and Rigid Template
NET WINCH Sport Pole Net Winch (Cable not included)

SPORT POLE Sports/Recreational Light System

ADDITIONAL DIMENSIONS

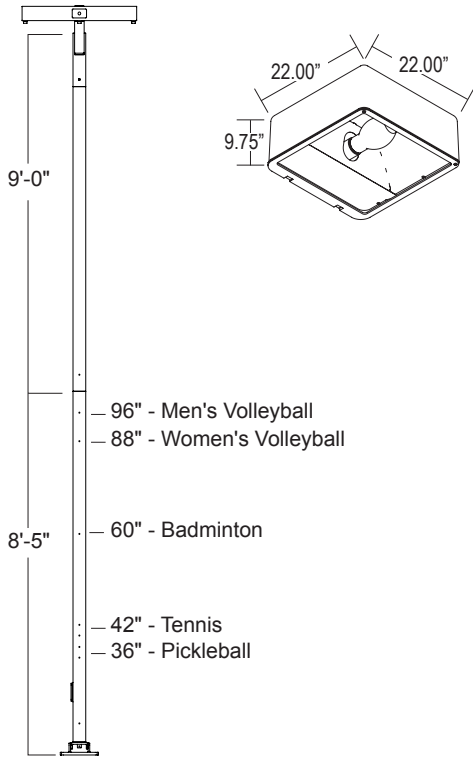

1 S121 shields must be specified as left or right sided shield from the mounting side point of view.