



landscape • entertainment • architectural • hospitality • illumination

PL-19 SERIES PATH LIGHT





PATH LIGHTS PL-19 SERIES



TYPE

SPECIFICATIONS


CONSTRUCTION: Spun brass hat; matching extruded brass top mount stanchion
LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)
LAMP OPTIONS: We recommend 3w 50,000 hours average rating OMNI-3 LED (-LED3) or OMNI-3 Super Saver (-LED3SS) 10,000 hours average rating 20w Xenon (-X) or 20w Halogen (-H)
SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)
WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)
 For 25 foot 16/2 fixture lead wire add -25F to catalog number
CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only
MOUNTING: FA-03 black 9" ABS stake, tapped 1/2" NPS
FINISH: Unfinished brass, optional finishes available



PL-19-BAR

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-19-BRS	Spun Brass 5.5" Hat Path Light	18w S8 #1141	2.0 lbs.

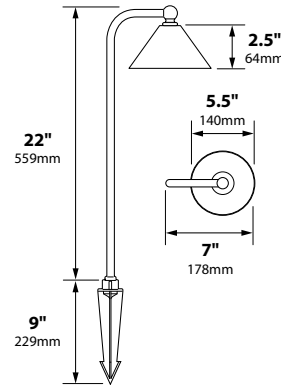


IP54



MOUNTING ACCESSORIES

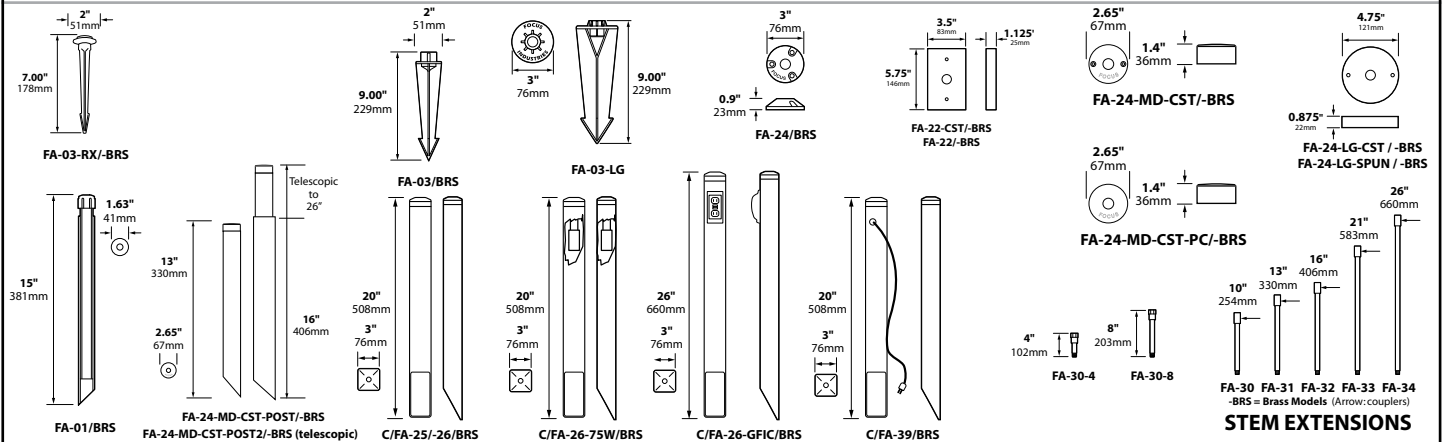

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



PL-19
Half Spread Photometrics
10 ft. (3.0m) diameter

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT