AL05 AREA LIGHT SPEC SHEET

PROJECT: TYPE: DATE:

CATALOG NUMBER:

LED TECHNOLOGY

ALUM

BRS

CATALOG ORDER LOGIC

EXAMPLE: AL05L12BLT

FIXTURE

AL	Area Light

TYPE

05

12 VOLT LED

12 VOLT LED	WATT	SOCKET	KELVIN	LUMEN
☐ NL (No Lamp)		Ba15s Single Contact		
☐ NLBP (No Lamp)		G4 Bi-Pin		
☐ L10	3w	G4 Bi-Pin	3000K	300lm
☐ L12	3w	Ba15s Single Contact	3000K	300lm
☐ L13	3w	G4 Bi-Pin	2700K	270lm
☐ L14	3w	G4 Bi-Pin	3000K	270lm
☐ L15	3w	Ba15s Single Contact	2700K	270lm
☐ L16	3w	Ba15s Single Contact	3000K	270lm
☐ L17	3w TF	G4 Bi-Pin	Amber	585-595nm
☐ L18	3w TF	Ba15s Single Contact	Amber	585-595nm

(TF) Turtle Friendly Light Source

120 VOLT LED

120 VOLT LED	WATT	SOCKET	KELVIN	LUMEN
☐ NL120VDC		Double Contact		
☐ NL120VBP		Bi-Pin		
☐ L160	3w	Bi-Pin	3000K	400lm

Note: FA97 Sprinkler shield required for 120v. Order as accessory separately.

OPTIONS

☐ 25F	25 Foot Fixture Lead Wire

CUSTOM STEM LENGTH

15"	15.00" Standard Stem Length
☐ Custom Length	_____ (S)
	(State Custom Length On the Line Above)

FINISH (standard finishes listed)

☐ BLT	(Aluminum - Black Texture Powder Coat)
☐ BRT	(Aluminum - Bronze Texture Powder Coat)
☐ BRS	(Unfinished- Brass)

Premium and Acid Finishes (See page 4 for more color options)
Pantone & RAL Colors (Enter RAL or Pantone number at end of part number)

SHIP WEIGHT

| Aluminum 6061	(2.0lbs)
Brass C27200	(3.0lbs)

ADDITIONAL INFORMATION

LED Panel options available. See AL05LEDP Spec Sheet for More Information.
Adjustable hub available. Please note (-AH) in part number. (Example: AL05**AH**L12BLT)

cETLus Intertek   **IP65**

FOCUS INDUSTRIES®
landscape · architectural · hospitality · entertainment · *illumination*

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

**DESIGNED
MANUFACTURED
IN THE USA**
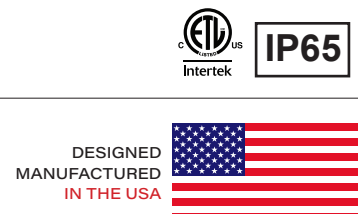
PROJECT: | TYPE: | DATE:

CATALOG NUMBER:

DIMENSIONS

Dimensions Shown with 9in ABS Stake

AL05BLT

Dimensions Shown with Large 9in ABS Stake

AL05BRS

10.00in [190.50mm]

10.00in [190.50mm]

4.50in [114.30mm]

4.50in [114.30mm]

15.00in [304.80mm]

15.00in [304.80mm]

GRADE

(FA03)
Standard Low Voltage
Mounting Stake
Aluminum Fixture

(FA03LG)
Standard Low Voltage
Mounting Stake
Brass Fixture Only
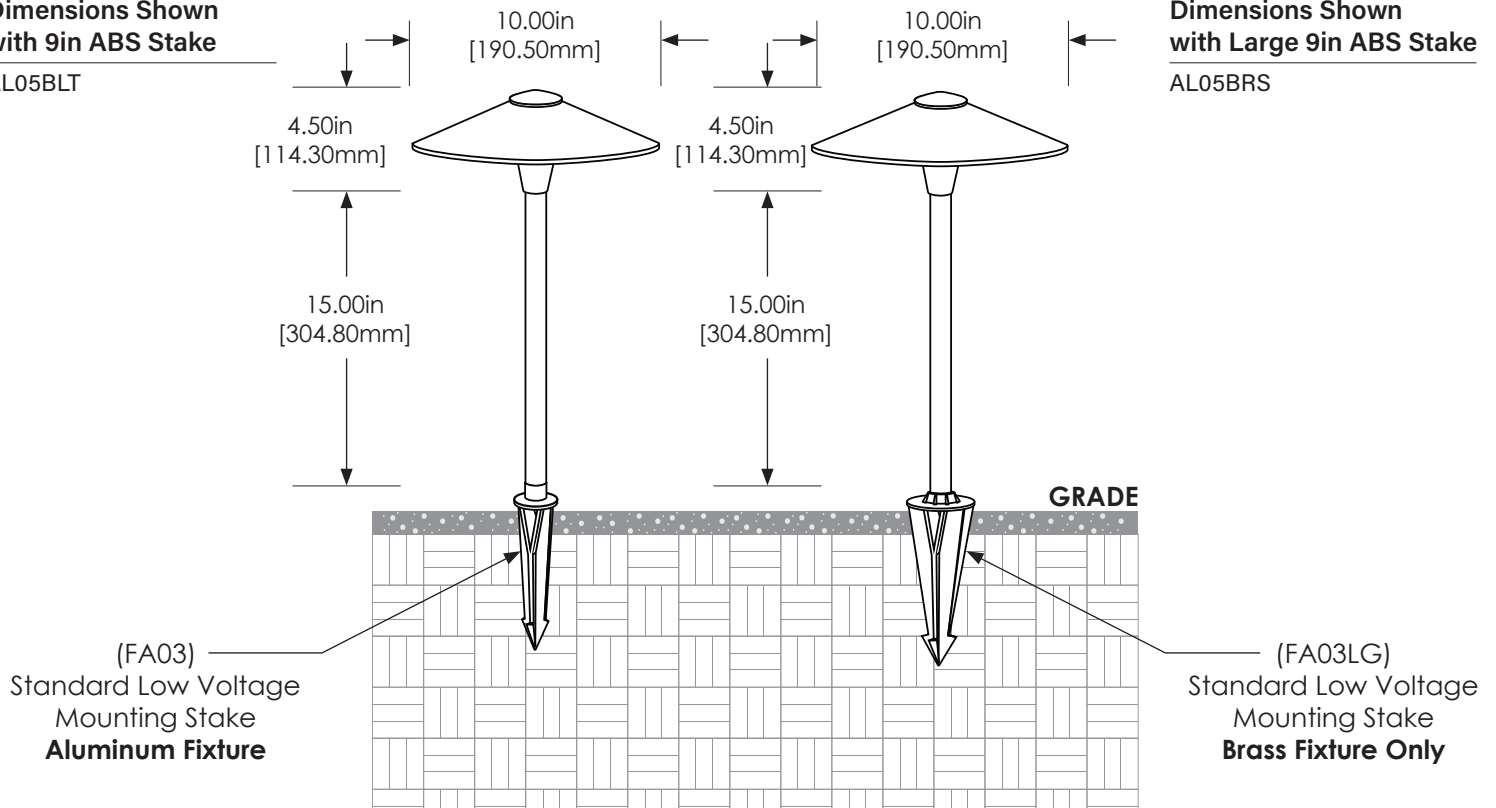
SPECIFICATIONS

INTERNALS	VOLTAGE	12V / 120V with 60w LED Transformer (Sealed junction box, supplied by others)
	WIRING	12in cut/split/strip 18/2 zip cord from fixture
	CONNECTOR	HW1260LED: 60w 120v electronic LED transformer, class 2
EXTERNALS	HAT	Die cast 6061 aluminum or C27200 brass china hat 10.00" dia.
	HUB	Die cast aluminum or brass center hub. (Adjustable hub available, add -AH to part number. Example: AL05AHL12BLT)
	STEM	Extrusion, aluminum 6061, round sch 40 pipe, .840" OD x .622"ID x 15.00"L x .109"W Extrusion, brass, C27200, round sch 40 pipe, .840" OD, .622" ID x 15.00" L x .109"W
	MOUNT	Aluminum version: FA03 ABS black stake, .50" NPS tapped. Low voltage only. (More options available. See page 3.) Brass version: FA03LG ABS large black stake, .50" NPS tapped. Low voltage only. (More options available. See page 3.)
	FINISH	Aluminum: Black or Bronze texture (Standard) See page 4 for more powder coat options. Brass: Unfinished (Standard) See page 4 for more powder coat and acid treatment options.
	LISTINGS	ETL. IP65. CE IES files available for download.

Click Icon to Download

ETL Intertek

IP65

FOCUS INDUSTRIES

landscape · architectural · hospitality · entertainment · illumination

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA. 92630
949.830.1350 | TOLL FREE: 888.882.1350
WWW.FOCUSINDUSTRIES.COM

DESIGNED
MANUFACTURED
IN THE USA

PROJECT: TYPE: DATE:

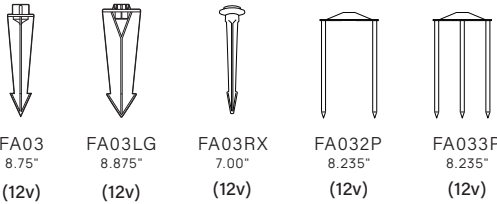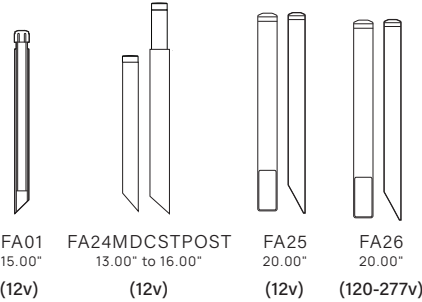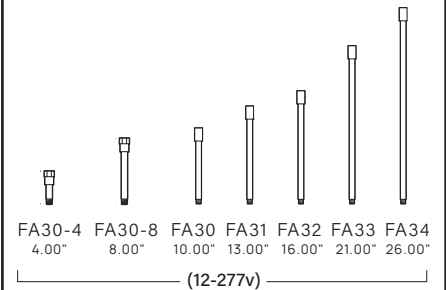CATALOG NUMBER:

Stakes

FA03	FA03LG	FA03RX	FA032P	FA033P
8.75"	8.875"	7.00"	8.235"	8.235"
(12v)	(12v)	(12v)	(12v)	(12v)

Mounting Posts

FA01	FA24MDCSTPOST	FA25	FA26
15.00"	13.00" to 16.00"	20.00"	20.00"
(12v)	(12v)	(12v)	(120-277v)

Extension Wands & Couplers

FA30-4	FA30-8	FA30	FA31	FA32	FA33	FA34
4.00"	8.00"	10.00"	13.00"	16.00"	21.00"	26.00"

(12-277v)

Canopies

FA24/BRS	FA24MDCST/BRS	FA24MDCSTPC/BRS	FA24LGSPUN/BRS	FA24LGCST/BRS	FA22LGCST/BRS
3.00"dia.	2.65"dia.	2.65"dia.	4.75"dia.	4.75"dia.	5.75"
(12v)	(12v)	(12v)	(12v)	(12-277v)	(12-277v)

Sprinkler Shield

Note: Required for 120 Volt
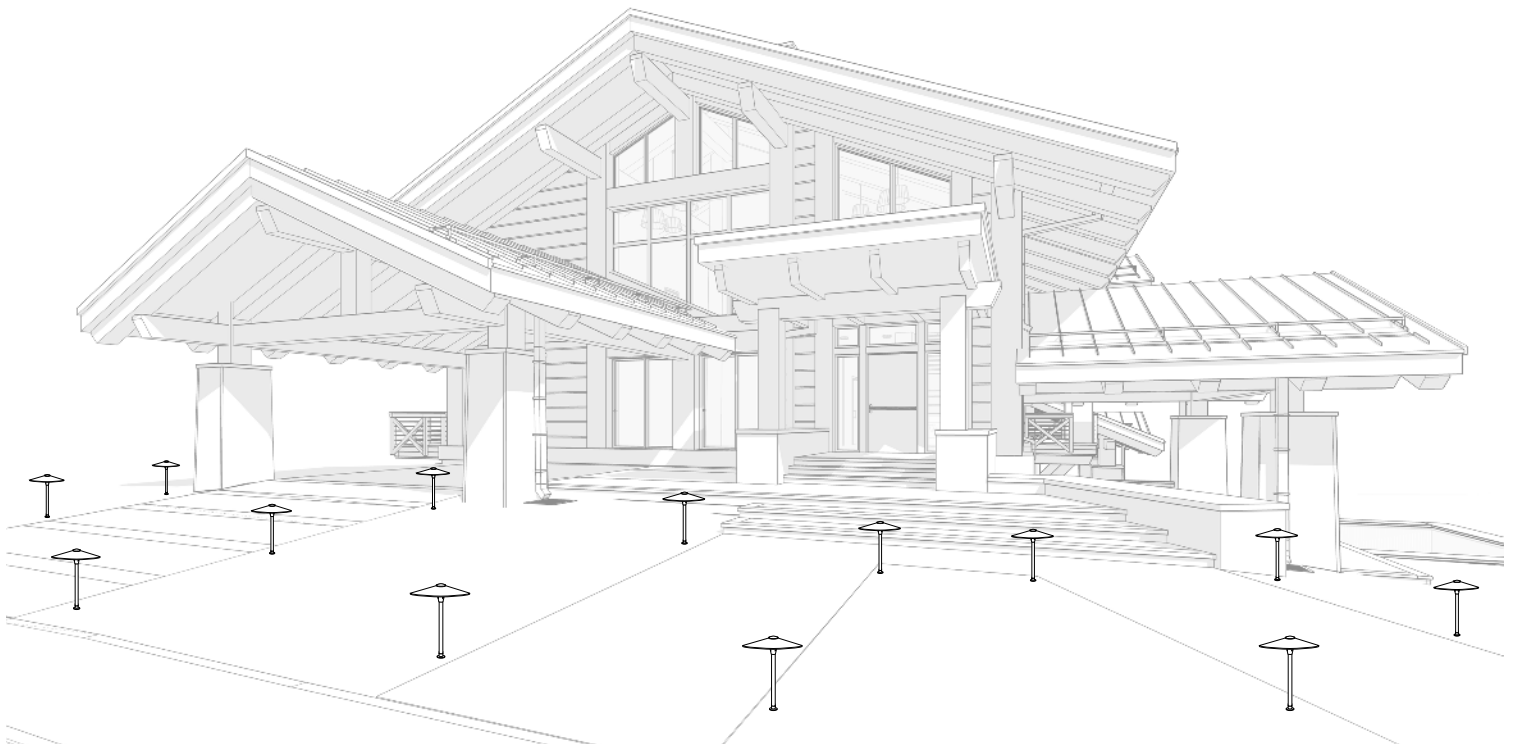
FA97
1.75"dia.
(12v)

ETL Intertek c us   IP65

DESIGNED
MANUFACTURED
IN THE USA

AL05 AREA LIGHT SPEC SHEET
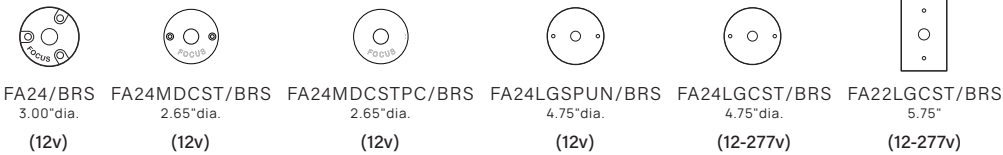
PROJECT: TYPE: DATE:

CATALOG NUMBER:

LED DATA

12v OMNI 3 DATA

L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L10	3000K	80	3	300	50,000
L12	3000K	80	3	300	50,000
L13	2700K	80	3	270	50,000
L14	3000K	80	3	270	50,000
L15	2700K	80	3	270	50,000
L16	3000K	80	3	270	50,000
L17	Amber	~	3	(585-595nm)	50,000
L18	Amber	~	3	(585-595nm)	50,000

120v OMNI 3 DATA

L#	CCT	CRI	WATTS	LUMENS	RATED HOURS
L160	3000K	80	3	400	50,000

FINISHES

STANDARD FINISHES

Black Texture (-BLT)

Bronze Texture (-BRT)

PREMIUM FINISHES

Dark Bronze (-DBZ)

Black Magic (-BKM)

White Gloss (-WHT)

White Texture (-WTX)

Stucco (-STU)

Chrome Powder (-CPR)

Weathered Iron (-WIR)

Weathered Brown (-WBR)

Rust (-RST)

NEW Luna (-LUN)

Rubbed Verde (-RBV)

Hunter Texture (-HTX)

### CUSTOM FINISHES Supply RAL or Pantone here

RAL #:

Need help finding a RAL color?
https://www.ralcolor.com/

PANTONE #:

Need help finding a Pantone color?
https://www.pantone.com/color-finder

ACID FINISHES Brass and Copper fixtures only

Acid Rust
Copper (-CAR)
Brass (-BAR)

Black Acid Treatment (-BAT)

Acid Verde
Copper (-CAV)
Brass (-BAV)

ETL Intertek

IP65