


NAME:

DATE:

PROJECT:

B-6L2

BOLLARD

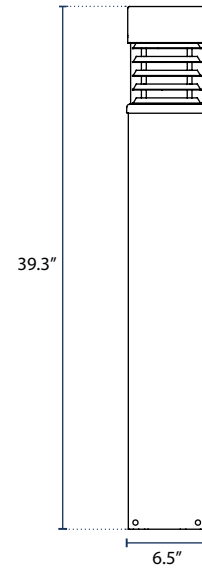

SPECIFICATIONS

Casting

Extruded Aluminum

Finish

Die-Cast Aluminum

Voltage

120-277V

Beam Angle

150°

Driver

Meanwell

Mounting

Qty. (3) 3/8"x16" Anchor Bolts
Surface

CRI

>70

Efficiency

70 lm/W

LED's

Available Upon Request

Warranty

5-Year

Lamp Type

Integrated LED Board

ORDERING

BOLLARD	CCT	WATTAGE	VOLTAGE	FINISH
B-6L2	<input type="text"/>	25W	100-277V	<input type="text"/>
	3000K			DB Dark Bronze
	4000K			BK Black
	5000K			