




SLS-LF SERIES SIGN LIGHT


TYPE

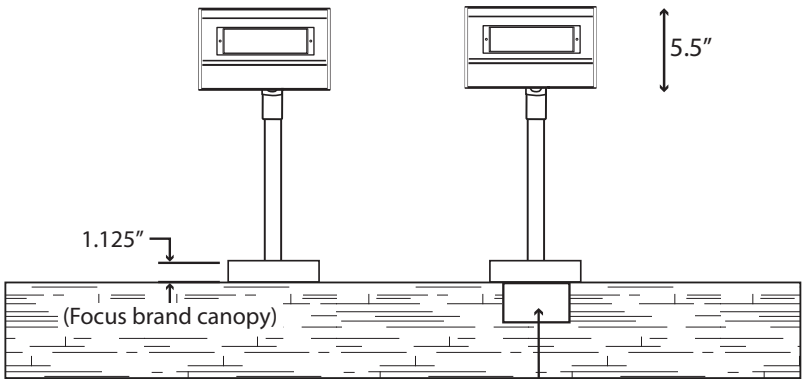

Optional contractor installed junction box (supplied by others) must be designed to hold full fulcrum weight of fixture.



0



A

HOOD STYLES

FA-24-LG-CST



4.75" Dia. X 1.125"
1/2"NPS Center Hole

FA-22-LG-CST






3.25" X 5.75" X 1.125"
1/2"NPS Center Hole

CANOPY STYLES

EXTENSION POLE STYLES

A



U-BEND



GOOSE NECK

SPECIFICATIONS

Aluminum: Extruded housing with heavy duty die cast adjustable aluminum swivels. Aluminum extension pole and mounting canopies.

Lens: High-impact clear acrylic

LED Light Source:

8w 3000K LED Panel, 360 lumens each panel
8w 5200K LED Panel, 380 lumens each panel
12w 3000K LED Panel, 1080 lumens each panel
12w 5200K LED Panel, 1160 lumens each panel

Socket:

None (LED Panel hard wired)

Wiring:

120v - Standard 120v black, white & green
12v - Black 18/2 SPT -1W 8" from base of fixture

LED Power Supply:


120v - Universal 120v to 277v input, 700mA
12v: - 8v-18v input, 700mA

Finish: See color options in ordering information below


IP53




8w



12W



2 x 12w



ORDERING INFORMATION

SLS-LF- 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11

1. MATERIAL

A: ALUMINUM

2. VOLTAGE

1: 120V

2: 277V

3: 12V

3. LIGHT SOURCE

01: 8W LED PANEL 3000K

02: 8W LED PANEL 5200K

03: 12W LED PANEL 3000K

04: 12W LED PANEL 5200K

05: 2 X 12W LED PANELS 3000K

06: 2 X 12W LED PANELS 5200K

4. HOOD STYLE

0: NO HOOD

A: HOOD EXTENSION

5. LENS TYPE

0: STANDARD CLEAR

1: SANDBLASTED SOFTENER LENS

2: WHITE ACRYLIC

6. LENS ENHANCEMENT

0: NO LENS ENHANCEMENT

A: BLUE GEL

B: GREEN GEL

7. GLARE SHIELDING

0: NO SHIELDING

H: HEX CELL LOUVER

8. EXTENSION POLE LENGTH

NP: NO POLE

12: 12 INCHES

18: 18 INCHES

24: 24 INCHES

30: 30 INCHES

36: 36 INCHES

CUSTOM: (ADDER PER INCH)

9. EXTENSION POLE STYLE

A: STRAIGHT

B: 30° BEND

C: 45° BEND

D: U BEND (PROVIDE SPEC)

E: GOOSE NECK (PROVIDE SPEC)

F: CUSTOM BEND (PROVIDE SPEC)

10. CANOPY

0: NO CANOPY (1/2" NPS REQUIRED)

1: FA-24-LGCST ALUM ROUND

2: FA-22-CST ALUM RECTANGLE

11. COLOR

BLT/BRT: BLACK OR BRONZE TEXTURE (STANDARD)

OTHER POWDER COLOR FIXTURE

OTHER POWDER COLOR POLE

OTHER POWDER COLOR CANOPY