

SPECIFICATIONS

CONSTRUCTION: Aluminum or brass tree ring, 20", 24", 30", 36" diameter. Adjustable fixture hubs allow precise placement of fixtures around tree ring
 20" Model fits trunk diameter of 7"-11" and accommodates up to 4 fixtures
 24" Model fits trunk diameter of 11"-15" and accommodates up to 6 fixtures
 30" Model fits trunk diameter of 17"-21" and accommodates up to 6 fixtures
 36" Model fits trunk diameter of 23"-27" and accommodates up to 6 fixtures

MOUNTING: 4x 3/8" x 6" SS Hex Bolts (to secure to tree trunk)
 2x 3/8" x 1.5" SS Hex Bolts (closes ring)
 4x or 6x 1/2" NPT fittings (secures up to four or six fixtures)

12V TREE RING: One CFA-111 junction box/fixture hub to make 12v wire connections inside for each fixture and 120v LED Driver/Transformer connections if input power to tree ring is 120v.
 Additional 12v hubs on tree ring are machined aluminum or brass 1/2NPS female hubs.
 All hubs are horizontally adjustable for precise placement of fixtures around tree ring.

120V TREE RING: All hubs are aluminum or brass 120v FA-111 junction boxes with 1/2" NPS female for fixture mounting.
 All hubs are horizontally adjustable for precise placement of fixtures around tree ring.

FINISH:

Aluminum - Black Texture (-BLT) or Bronze Texture (-BRT) powder coat
 Brass - Unfinished (-BRS) or Acid Rust (-BAR)

Note: All fixtures, LED drivers and transformers sold separately

Tools Required: #8 (5/32) and #4 (3/32) Allen hex key wrench

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	SHIP WEIGHT
12v		
FA-TR-204H-BLT	20" 12v Aluminum Tree ring w/ 4 fixture hubs	5.0 lbs
FA-TR-244H-BLT	24" 12v Aluminum Tree ring w/ 4 fixture hubs	6.0 lbs
FA-TR-304H-BLT	30" 12v Aluminum Tree ring w/ 4 fixture hubs	7.0 lbs
FA-TR-364H-BLT	36" 12v Aluminum Tree ring w/ 4 fixture hubs	8.0 lbs
FA-TR-204H-BRS	20" 12v Brass Tree ring w/ 4 fixture hubs	7.0 lbs
FA-TR-244H-BRS	24" 12v Brass Tree ring w/ 4 fixture hubs	8.0 lbs
FA-TR-304H-BRS	30" 12v Brass Tree ring w/ 4 fixture hubs	9.0 lbs
FA-TR-364H-BRS	36" 12v Brass Tree ring w/ 4 fixture hubs	10.0 lbs
120v		
FA-TR-204H120-BLT	20" 120v Aluminum Tree ring w/ 4 fixture hubs	5.0 lbs
FA-TR-244H120-BLT	24" 120v Aluminum Tree ring w/ 4 fixture hubs	6.0 lbs
FA-TR-304H120-BLT	30" 120v Aluminum Tree ring w/ 4 fixture hubs	7.0 lbs
FA-TR-364H120-BLT	36" 120v Aluminum Tree ring w/ 4 fixture hubs	8.0 lbs
FA-TR-204H120-BRS	20" 120v Brass Tree ring w/ 4 fixture hubs	7.0 lbs
FA-TR-244H120-BRS	24" 120v Brass Tree ring w/ 4 fixture hubs	8.0 lbs
FA-TR-304H120-BRS	30" 120v Brass Tree ring w/ 4 fixture hubs	9.0 lbs
FA-TR-364H120-BRS	36" 120v Brass Tree ring w/ 4 fixture hubs	10.0 lbs

Individual hubs for adding 12v fixtures to a tree ring:


FA-TR-HUB-BLT 12v Aluminum Tree Ring Hub, 1/2" NPS, BLACK TEXTURE

FA-TR-HUB-BRS 12v Brass Tree Ring Hub, 1/2" NPS

Individual J-box for adding 120v fixtures to a tree ring:

FA-TR-JBOX 120v/12v Composite Tree Ring J-Box (CFA-111), 1/2" NPS

Note: All fixtures, drivers & transformers sold separately

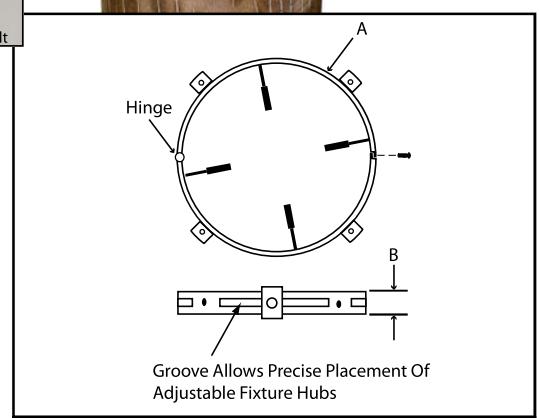

	A	B
FA-TR-20	20" Dia.	2"
FA-TR-24	24" Dia.	2"
FA-TR-30	30" Dia.	2"
FA-TR-36	36" Dia.	2"



LED Drivers & Transformers fit inside
 CFA-111 junction box on 12v Tree Ring
 (Drivers & Transformers sold separately)

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment	
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR		-BAR/CAR	-BAV/CAV	-BAT