

PL-17-S1 SERIES PATH LIGHTS



PATH LIGHTS

PL-17-S1 SERIES




TYPE

SPECIFICATIONS

CONSTRUCTION: 1.00" Extruded aluminum or brass L shape design
LENS: High impact sandblasted flat glass
LAMP SUPPLIED: 50,000 hour 3w OMNI-3 Super Saver LED (-LEDSS)
LAMP OPTIONS: 50,000 hour 3w OMNI-3 LED (-LED3) or 40,000 hour 2w LED strip (-LEDSS)
SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)
WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)
 For 25 foot 16/2 fixture lead wire add -25F to catalog number
MOUNTING: FA-03 black 9" ABS stake, tapped 1/2" NPS
FINISH: Aluminum-Black texture polyester powder coat. Optional finishes available.

Note: Not for use with halogen/xenon lamps. Use LED only.

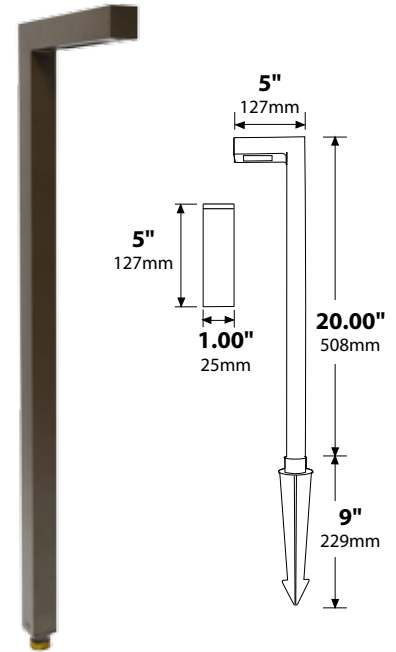


ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-17-S1-LED3SSBLT	1" Extruded Aluminum Path Light	3w OMNI-3 SS LED	2.0 lbs.
PL-17-S1-LED3BLT	1" Extruded Aluminum Path Light	3w OMNI-3 LED	2.0 lbs.
PL-17-S1-LED3BLT	1" Extruded Aluminum Path Light	2w LED Strip	2.0 lbs.
PL-17-S1-LED3SSBRS	1" Extruded Brass Path Light	3w OMNI-3 SS LED	2.0 lbs.
PL-17-S1-LED3BRS	1" Extruded Brass Path Light	3w OMNI-3 LED	2.0 lbs.
PL-17-S1-LED3BRS	1" Extruded Brass Path Light	2w LED Strip	2.0 lbs.



MOUNTING ACCESSORIES

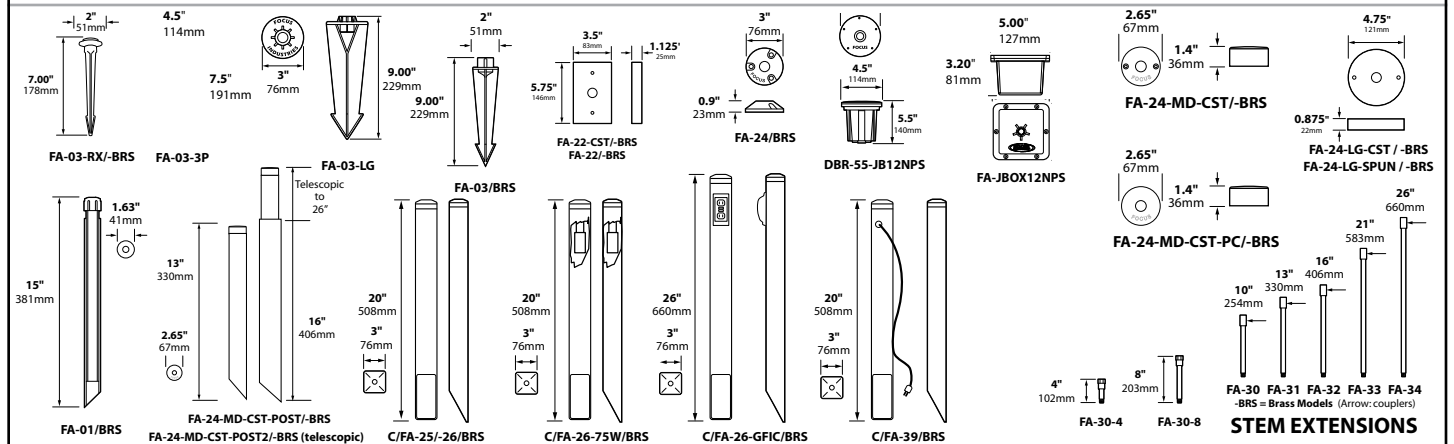

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

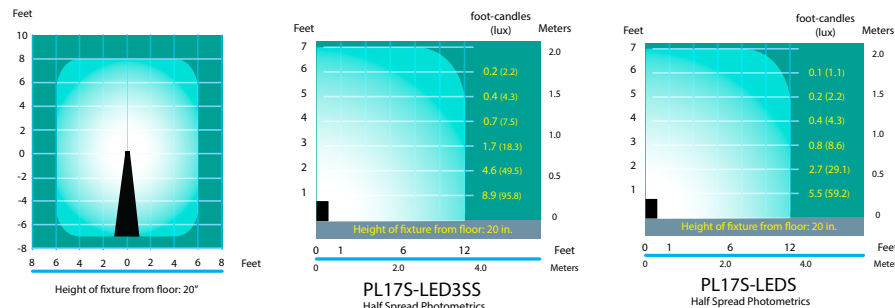

JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT