

PATH LIGHTS PL-07-XSM SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: 0.75" diameter extruded copper post with matching 0.90" diameter copper cap

LENS: Frosted high-impact acrylic

LAMP SUPPLIED: T9 10w Xenon bi-pin; 10,000 hours average rating (10w max)

LAMP OPTIONS: None

SOCKET: Bi-pin G4 base with 200°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)


MOUNTING: Angle cut post

Deck Mount version (-DM) available with FA-03 black 9" ABS stake, tapped 1/2" NPS

FINISH: Unfinished copper. Optional finishes available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-07-XSM-COP	Copper X-Small Bollard	10w Xenon	2.0 lbs.
PL-07-XSM-DM-COP	Copper X-Small Bollard, Deck Mount	10w Xenon	2.0 lbs.

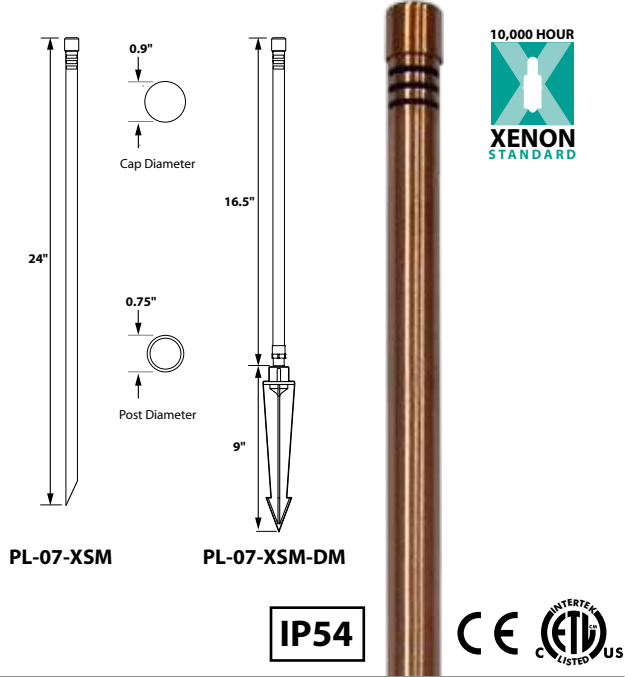


PL-07-XSM

PL-07-XSM-DM


IP54

CE ETL US LISTED

MOUNTING ACCESSORIES

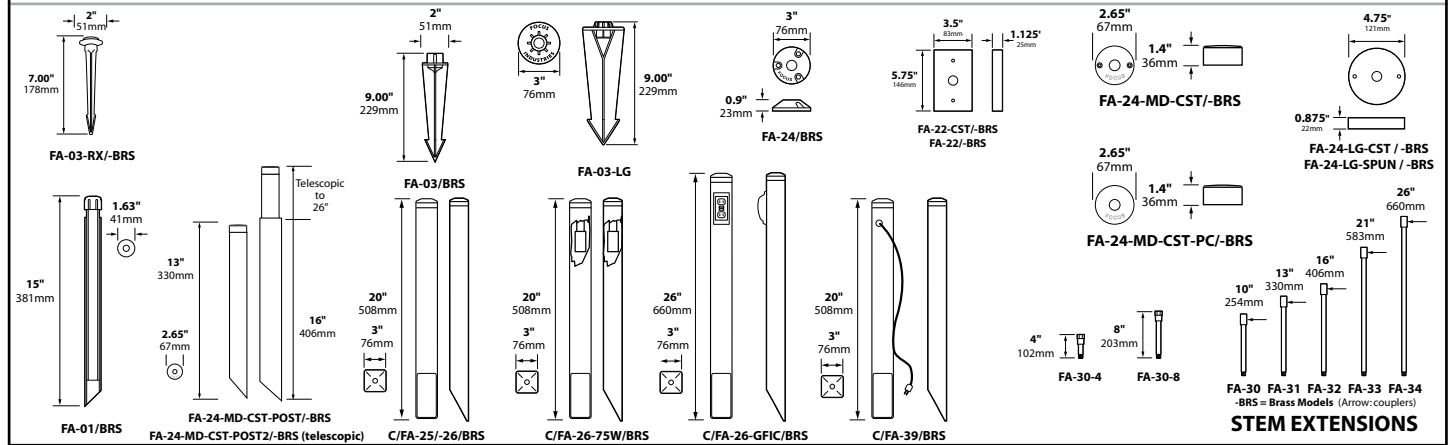

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT