



ANCHOR BOLTS

GALVANIZED STEEL ANCHOR BOLTS

Catalog Number	
Project	Type



FEATURES & SPECIFICATIONS

ANCHOR BOLTS — Techlight anchor bolts are constructed out of ASTM F1554 Grade 55 Steel. Available in galvanized finish. Set includes 2 nuts and 2 flat washers per bolt for installation. Sold as a set of four (4) anchor bolts.

See below for anchor bolt projection table.

FINISH — Techlight anchor bolts are only available fully galvanized per ASTM A153 Class C with a hot-dip galvanized finish.

ORDERING INFORMATION


Choose the bold face options for the appropriate configuration for your application and enter on the line above each fixture attribute.

EXAMPLE:

PAB 3430 G

PAB		
ANCHOR BOLTS	SIZE	FINISH
PAB	3418 = 3/4" Ø X 18" LG 3430 = 3/4" Ø X 30" LG 136 = 1" Ø X 36" LG 12542 = 1 1/4" Ø X 42" LG 1554 = 1 1/2" Ø X 54" LG	G = Galvanized

ANCHOR BOLT PROJECTION

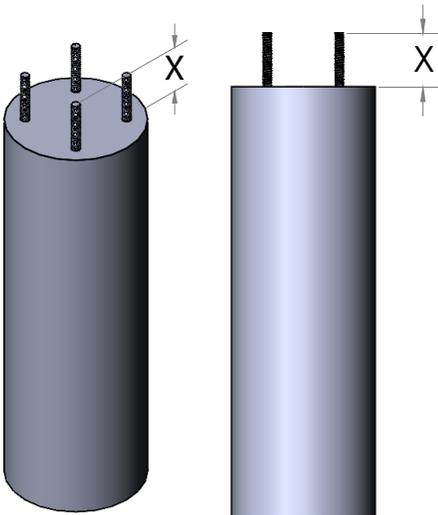


ANCHOR BOLT	SIZE	X = PROJECTION	MATERIAL SPEC
PAB3418G	3/4" Ø X 18" LG	4"	ASTM F1554 GD 55 STL
PAB3430G	3/4" Ø X 30" LG	4"	ASTM F1554 GD 55 STL
PAB136G	1" Ø X 36" LG	4"	ASTM F1554 GD 55 STL
PAB12542G	1 1/4" Ø X 42" LG	6"	ASTM F1554 GD 55 STL
PAB1554G	1 1/2" Ø X 54" LG	6 1/2"	ASTM F1554 GD 55 STL



ANCHOR BOLTS Galvanized Steel Anchor Bolts

DIMENSIONS



PAB3418G

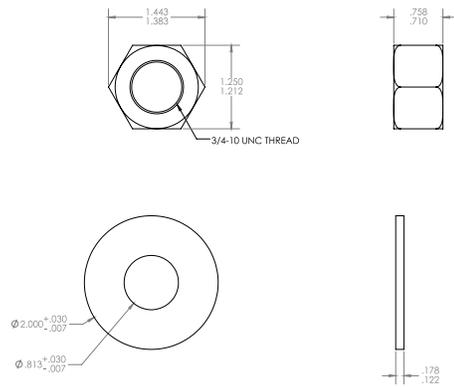

PAB3430G

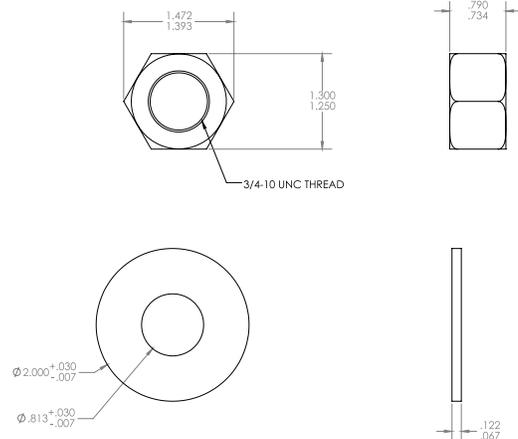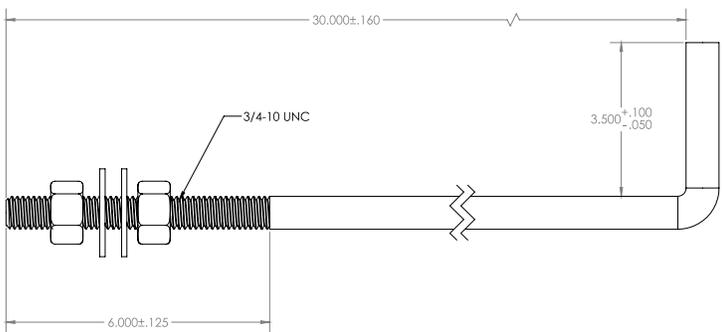


PAB136G

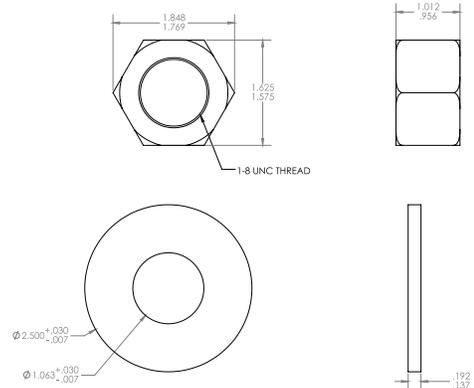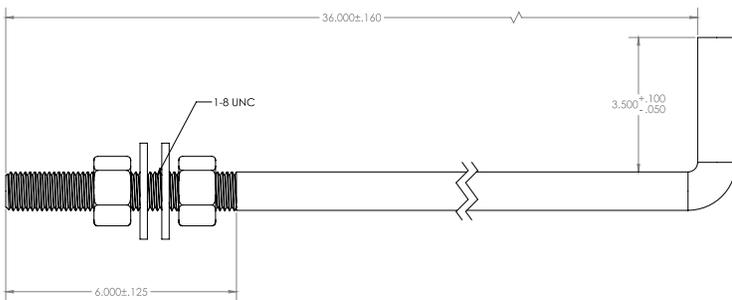

ANCHOR BOLTS Galvanized Steel Anchor Bolts

DIMENSIONS (cont.)

PAB12542G

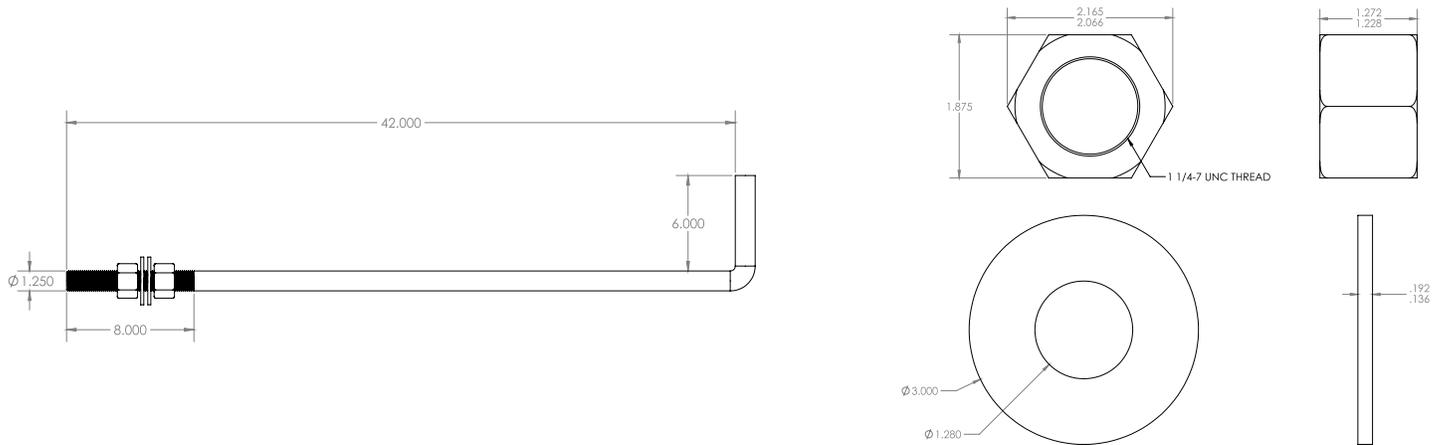

PAB1554G (SHOWN WITH RIGID STEEL TEMPLATE)

